



whitedriveproducts



SERIES

155 -

156 -



LIGHT DUTY
Hydraulic Motor



OVERVIEW

The WP motor series is an economical alternative to more complex geroler designs that still provides high efficiency across a wide performance range. These motors are intended for light-duty applications requiring high torque in a compact package and are suitable for industrial and mobile applications including car wash brushes, food processing equipment, conveyors, machine tools, agricultural equipment, sweepers, skid steer attachments, and more.

FEATURES / BENEFITS


- Built-in check valves offer versatility and increased seal life.
- A variety of mounts and shafts provide flexibility in application design.
- Spool valve design gives superior performance and smooth operation over a wide speed and torque range.
- Standard high pressure shaft seals offer superior seal life and performance.

TYPICAL APPLICATIONS

agriculture equipment, conveyors, carwashes, sweepers, food processing, grain augers, spreaders, feed rollers, augers, brush drives and more

SERIES DESCRIPTIONS

155/156 - Hydraulic Motor
Standard

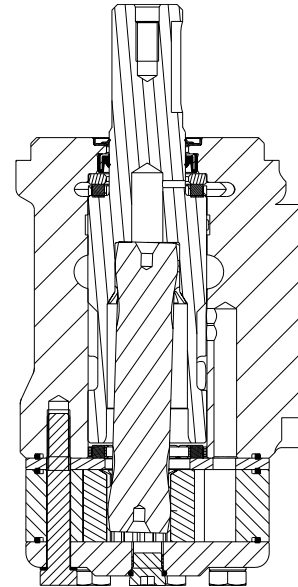

SPECIFICATIONS

| CODE | Displacement cm ³ [in ³ /rev] | Max. Speed rpm | | Max. Flow lpm [gpm] | | Max. Torque Nm [lb-in] | | Max. Pressure bar [psi] | | |
|------|--------------------------------------------------------|-------------------|--------|------------------------|---------|---------------------------|------------|----------------------------|------------|------------|
| | | cont. | inter. | cont. | inter. | cont. | inter. | cont. | inter. | peak |
| 025 | 25 [1.5] | 1570 | 1687 | 40 [11] | 45 [12] | 35 [310] | 48 [425] | 100 [1450] | 140 [2030] | 225 [3260] |
| 032 | 32 [2.0] | 1550 | 1674 | 50 [13] | 55 [15] | 45 [398] | 57 [504] | 100 [1450] | 140 [2030] | 225 [3260] |
| 040 | 40 [2.5] | 1471 | 1670 | 60 [16] | 70 [19] | 65 [575] | 74 [655] | 100 [1450] | 140 [2030] | 225 [3260] |
| 050 | 50 [3.0] | 1208 | 1500 | 60 [16] | 75 [20] | 91 [805] | 108 [956] | 140 [2030] | 175 [2540] | 240 [3480] |
| 060 | 59 [3.6] | 1185 | 1271 | 60 [16] | 75 [20] | 125 [1106] | 136 [1204] | 160 [2320] | 175 [2540] | 240 [3480] |
| 080 | 78 [4.8] | 896 | 960 | 60 [16] | 75 [20] | 164 [1451] | 183 [1620] | 160 [2320] | 175 [2540] | 240 [3480] |
| 100 | 96 [5.9] | 728 | 780 | 60 [16] | 75 [20] | 195 [1726] | 213 [1885] | 160 [2320] | 175 [2540] | 240 [3480] |
| 125 | 125 [7.6] | 559 | 599 | 60 [16] | 75 [20] | 258 [2285] | 278 [2460] | 160 [2320] | 175 [2540] | 240 [3480] |
| 160 | 154 [9.4] | 452 | 483 | 60 [16] | 75 [20] | 321 [2840] | 362 [3205] | 160 [2320] | 175 [2540] | 240 [3480] |
| 200 | 190 [11.6] | 367 | 385 | 60 [16] | 75 [20] | 380 [3365] | 420 [3720] | 150 [2180] | 175 [2540] | 240 [3480] |
| 250 | 240 [14.6] | 291 | 312 | 60 [16] | 75 [20] | 445 [3940] | 557 [4930] | 140 [2030] | 175 [2540] | 240 [3480] |
| 315 | 303 [18.5] | 228 | 245 | 60 [16] | 75 [20] | 460 [4071] | 602 [5330] | 120 [1740] | 160 [2320] | 200 [2900] |
| 400 | 388 [23.7] | 155 | 189 | 60 [16] | 75 [20] | 488 [4320] | 625 [5532] | 95 [1380] | 125 [1810] | 180 [2610] |

► Performance data is typical. Performance of production units varies slightly from one motor to another. Running at intermittent ratings should not exceed 10% of every minute of operation.



DISPLACEMENT PERFORMANCE

| | | | | | | | |
|-------------------------------------------------|------------------------|----------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|------------|
| 025 | | Pressure - bar [psi] | | Max. Cont. | | Max. Inter. | |
| | | 30 [435] | 60 [870] | 80 [1160] | 100 [1450] | 120 [1740] | 140 [2030] |
| 25 cm ³ [1.5 in ³] / rev | | Intermittent Ratings - 10% of Operation | | | | | |
| | | Torque - Nm [lb-in], Speed rpm | | | | | |
| Flow - lpm [gpm] | 5 [1.3] | 9 [80] 186 | 18 [159] 160 | 25 [221] 134 | 32 [283] 101 | 35 [310] 106 | 200 |
| | 10 [2.6] | 10 [88] 386 | 18 [159] 352 | 26 [230] 323 | 34 [301] 280 | 37 [327] 255 | 400 |
| | 15 [4.0] | 9 [80] 568 | 19 [168] 537 | 26 [230] 505 | 35 [310] 467 | 38 [336] 431 | 600 |
| | 20 [5.3] | 8 [71] 777 | 19 [168] 736 | 25 [221] 692 | 33 [292] 660 | 39 [345] 608 | 800 |
| | 25 [6.6] | 7 [62] 972 | 18 [159] 920 | 26 [230] 870 | 32 [283] 840 | 39 [345] 803 | 1000 |
| | 30 [7.9] | 6 [53] 1167 | 17 [150] 1122 | 25 [221] 1088 | 32 [283] 1055 | 39 [345] 998 | 1200 |
| | 35 [9.2] | 5 [44] 1360 | 16 [142] 1318 | 24 [212] 1282 | 31 [274] 1258 | 37 [327] 1216 | 1400 |
| | 40 [10.6] | 5 [44] 1570 | 15 [133] 1503 | 22 [195] 1476 | 31 [274] 1432 | 36 [319] 1394 | 1600 |
| | 45 [11.9] | | 13 [115] 1687 | 20 [177] 1636 | 28 [248] 1600 | 34 [301] 1558 | 1800 |
| | Max. Max. Inter. Cont. | | | | | | |
| Rotor Width | | Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/> | | | | | |
| 4.1 [1.60] mm [in] | | Theoretical Torque - Nm [lb-in] | | | | | |
| | | 12 [106] | 24 [211] | 32 [282] | 40 [352] | 48 [423] | 56 [493] |
| | | Displacement tested at 45°C [113°F] with an oil viscosity of 46cSt [213 SUS] | | | | | |

| | | | | | | | |
|-------------------------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|------------|
| 032 | | Pressure - bar [psi] | | Max. Cont. | | Max. Inter. | |
| | | 30 [435] | 60 [870] | 80 [1160] | 100 [1450] | 120 [1740] | 140 [2030] |
| 32 cm ³ [2.0 in ³] / rev | | Intermittent Ratings - 10% of Operation | | | | | |
| | | Torque - Nm [lb-in], Speed rpm | | | | | |
| Flow - lpm [gpm] | 5 [1.3] | 11 [97] 149 | 24 [212] 135 | 35 [310] 114 | 37 [327] 94 | | 156 |
| | 10 [2.6] | 12 [106] 308 | 27 [239] 284 | 37 [327] 270 | 43 [381] 250 | 46 [407] 240 | 313 |
| | 15 [4.0] | 11 [97] 465 | 26 [230] 444 | 36 [319] 429 | 45 [398] 398 | 48 [425] 378 | 469 |
| | 20 [5.3] | 10 [88] 624 | 25 [221] 589 | 35 [310] 575 | 44 [389] 557 | 46 [407] 544 | 625 |
| | 25 [6.6] | 9 [80] 780 | 24 [212] 771 | 34 [301] 751 | 42 [372] 735 | 45 [398] 719 | 781 |
| | 30 [7.9] | 8 [71] 931 | 23 [204] 908 | 32 [283] 895 | 40 [354] 876 | 45 [398] 857 | 938 |
| | 35 [9.2] | 7 [62] 1086 | 20 [177] 1066 | 29 [257] 1051 | 39 [345] 1030 | 43 [381] 1012 | 1094 |
| | 40 [10.6] | 7 [62] 1240 | 19 [168] 1212 | 27 [239] 1190 | 38 [336] 1178 | 43 [381] 1145 | 1250 |
| | 45 [11.9] | 6 [53] 1400 | 18 [159] 1382 | 26 [230] 1366 | 35 [310] 1340 | 42 [372] 1314 | 1406 |
| | 50 [13.2] | 5 [44] 1550 | 16 [142] 1526 | 24 [212] 1500 | 31 [274] 1478 | 40 [354] 1452 | 1563 |
| 55 [14.5] | | 12 [106] 1674 | 20 [177] 1641 | 28 [248] 1617 | 34 [301] 1584 | 1719 | |
| Max. Max. Inter. Cont. | | | | | | | |
| Rotor Width | | Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/> | | | | | |
| 5.1 [2.00] mm [in] | | Theoretical Torque - Nm [lb-in] | | | | | |
| | | 15 [135] | 31 [271] | 41 [361] | 51 [451] | 61 [541] | 71 [631] |
| | | Displacement tested at 45°C [113°F] with an oil viscosity of 46cSt [213 SUS] | | | | | |

► Performance data is typical. Performance of production units varies slightly from one motor to another.

DISPLACEMENT PERFORMANCE

| | | | | | | | | | |
|------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------|----------|-----------|------------|------------|-----------------------------------------|-------------|-----------|
| 040 | | Pressure - bar [psi] | | | | | Max. Cont. | Max. Inter. | |
| | | 30 [435] | 60 [870] | 80 [1160] | 100 [1450] | 120 [1740] | 140 [2030] | | |
| 40 cm ³ [2.5 in ³] / rev | | | | | | | | | |
| Flow - lpm [gpm] | | Torque - Nm [lb-in], Speed rpm | | | | | Intermittent Ratings - 10% of Operation | | |
| | | 5 [1.3] | 10 [2.6] | 20 [5.3] | 30 [7.9] | 40 [10.6] | 50 [13.2] | 60 [15.8] | 70 [18.5] |
| 15 [133] | 31 [274] | 38 [336] | 48 [425] | 56 [496] | | | | 250 | |
| 14 [124] | 31 [274] | 41 [363] | 54 [478] | 62 [549] | 70 [619] | | | 500 | |
| 13 [115] | 32 [283] | 41 [363] | 53 [469] | 65 [575] | 74 [655] | | | 750 | |
| 12 [106] | 30 [265] | 39 [345] | 51 [451] | 63 [558] | 74 [655] | | | 1000 | |
| 10 [88] | 27 [239] | 39 [345] | 51 [451] | 61 [540] | 72 [637] | | | 1250 | |
| 7 [62] | 25 [221] | 37 [327] | 49 [434] | 59 [522] | 71 [628] | | | 1500 | |
| 4 [35] | 23 [204] | 34 [301] | 46 [407] | 56 [496] | 68 [602] | | | 2000 | |
| 16 [142] | 30 [265] | 41 [363] | 52 [460] | 64 [566] | | | | | |
| Rotor Width | | Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input checked="" type="checkbox"/> | | | | | | | |
| 6.6 [260] mm [in] | | Theoretical Torque - Nm [lb-in] | | | | | | | |
| | | 19 [168] | 38 [336] | 50 [442] | 64 [566] | 76 [673] | 89 [788] | | |
| Displacement tested at 45°C [113°F] with an oil viscosity of 46cSt [213 SUS] | | | | | | | | | |

| | | | | | | | | | | |
|------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------|----------|-----------|------------|------------|-----------------------------------------|-------------|------------|-----------|
| 050 | | Pressure - bar [psi] | | | | | Max. Cont. | Max. Inter. | | |
| | | 30 [435] | 60 [870] | 80 [1160] | 100 [1450] | 120 [1740] | 140 [2030] | 160 [2320] | 175 [2540] | |
| 50 cm ³ [3.0 in ³] / rev | | | | | | | | | | |
| Flow - lpm [gpm] | | Torque - Nm [lb-in], Speed rpm | | | | | Intermittent Ratings - 10% of Operation | | | |
| | | 5 [1.3] | 10 [2.6] | 20 [5.3] | 30 [7.9] | 40 [10.6] | 50 [13.2] | 60 [15.8] | 70 [18.5] | 75 [19.8] |
| 19 [168] | 39 [345] | 48 [425] | 62 [549] | 75 [664] | | | | | 202 | |
| 20 [177] | 38 [336] | 50 [442] | 63 [558] | 78 [690] | 92 [814] | 102 [903] | 107 [947] | | 404 | |
| 18 [159] | 38 [336] | 52 [460] | 64 [566] | 78 [690] | 90 [796] | 104 [920] | 108 [956] | | 606 | |
| 15 [133] | 37 [327] | 50 [442] | 64 [566] | 77 [681] | 89 [788] | 103 [912] | 107 [947] | | 808 | |
| 12 [106] | 31 [274] | 45 [398] | 59 [522] | 73 [646] | 87 [770] | 99 [876] | 106 [938] | | 1010 | |
| 9 [80] | 27 [239] | 41 [363] | 55 [487] | 68 [602] | 84 [743] | 98 [867] | 105 [929] | | 1212 | |
| 6 [53] | 24 [212] | 37 [327] | 53 [469] | 64 [566] | 82 [726] | 95 [841] | 102 [903] | | 1414 | |
| 3 [27] | 17 [150] | 32 [283] | 44 [389] | 58 [513] | 80 [708] | 93 [823] | 98 [867] | | 1515 | |
| 15 [133] | 30 [265] | 40 [354] | 56 [496] | 77 [681] | 88 [779] | 93 [823] | | | | |
| Rotor Width | | Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input checked="" type="checkbox"/> | | | | | | | | |
| 6.6 [260] mm [in] | | Theoretical Torque - Nm [lb-in] | | | | | | | | |
| | | 24 [212] | 47 [416] | 63 [558] | 79 [699] | 95 [841] | 110 [973] | 126 [1115] | 138 [1221] | |
| Displacement tested at 45°C [113°F] with an oil viscosity of 46cSt [213 SUS] | | | | | | | | | | |

► Performance data is typical. Performance of production units varies slightly from one motor to another.



DISPLACEMENT PERFORMANCE

| | | | | | | | | | | |
|----------------------------------------------------------------------------------------------------------------------------|--------------------------------|-----------------|------------------|------------------|------------------|------------------|-------------------|-------------------|-----------------------------------------|-------------|
| 060 | Pressure - bar [psi] | | | | | | | | Max. Cont. | Max. Inter. |
| | 30 [435] | 60 [870] | 80 [1160] | 100 [1450] | 120 [1740] | 140 [2030] | 160 [2320] | 175 [2540] | | |
| 59 cm ³ [3.6 in ³] / rev | | | | | | | | | | |
| Flow - lpm [gpm] | Torque - Nm [lb-in], Speed rpm | | | | | | | | Intermittent Ratings - 10% of Operation | |
| | 5 [1.3] | 20 [177] 83 | 46 [407] 79 | 65 [575] 72 | 80 [708] 64 | 95 [841] 51 | 112 [991] 38 | | | 85 |
| | 10 [2.6] | 22 [195] 169 | 47 [416] 164 | 66 [584] 155 | 81 [717] 142 | 96 [850] 135 | 113 [1000] 124 | 125 [1106] 108 | 136 [1204] 88 | 170 |
| | 20 [5.3] | 20 [177] 338 | 45 [398] 332 | 64 [566] 320 | 80 [708] 309 | 93 [823] 290 | 111 [982] 276 | 123 [1088] 245 | 134 [1186] 222 | 339 |
| | 30 [7.9] | 17 [150] 507 | 43 [381] 502 | 62 [549] 493 | 76 [673] 482 | 89 [788] 468 | 109 [965] 454 | 121 [1071] 424 | 131 [1159] 400 | 509 |
| | 40 [10.6] | 14 [124] 678 | 41 [363] 669 | 58 [513] 660 | 73 [646] 645 | 87 [770] 630 | 105 [929] 616 | 117 [1035] 594 | 127 [1124] 582 | 678 |
| | 50 [13.2] | 10 [88] 845 | 37 [327] 841 | 55 [487] 833 | 70 [619] 818 | 84 [743] 805 | 102 [903] 792 | 113 [1000] 770 | 122 [1080] 754 | 848 |
| | 60 [15.8] | 7 [62] 1014 | 34 [301] 1005 | 52 [460] 999 | 66 [584] 992 | 82 [726] 982 | 99 [876] 968 | 109 [965] 956 | 118 [1044] 933 | 1017 |
| | 70 [18.5] | 4 [35] 1185 | 27 [239] 1182 | 47 [416] 1180 | 62 [549] 1175 | 76 [673] 1158 | 93 [823] 1144 | 104 [920] 1128 | 114 [1009] 1112 | 1186 |
| | 75 [19.8] | | 22 [195] 1271 | 43 [381] 1265 | 58 [513] 1256 | 73 [646] 1241 | 86 [761] 1228 | 100 [885] 1212 | 110 [973] 1196 | 1271 |
| Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/> | | | | | | | | | | |
| Theoretical Torque - Nm [lb-in] | | | | | | | | | | |
| Max. Cont. | 8.0 [314] | 28 [249] | 56 [499] | 75 [665] | 94 [831] | 113 [998] | 132 [1164] | 150 [1330] | 164 [1455] | |
| Max. Inter. | | | | | | | | | | |
| mm [in] | | | | | | | | | | |
| Displacement tested at 45°C [113°F] with an oil viscosity of 46cSt [213 SUS] | | | | | | | | | | |

| | | | | | | | | | | |
|----------------------------------------------------------------------------------------------------------------------------|--------------------------------|-----------------|-----------------|-----------------|------------------|-------------------|-------------------|-------------------|-----------------------------------------|-------------|
| 080 | Pressure - bar [psi] | | | | | | | | Max. Cont. | Max. Inter. |
| | 30 [435] | 60 [870] | 80 [1160] | 100 [1450] | 120 [1740] | 140 [2030] | 160 [2320] | 175 [2540] | | |
| 78 cm ³ [4.8 in ³] / rev | | | | | | | | | | |
| Flow - lpm [gpm] | Torque - Nm [lb-in], Speed rpm | | | | | | | | Intermittent Ratings - 10% of Operation | |
| | 5 [1.3] | 32 [283] 60 | 62 [549] 56 | 80 [708] 50 | 106 [938] 42 | 125 [1106] 30 | | | | 64 |
| | 10 [2.6] | 31 [274] 125 | 64 [566] 118 | 84 [743] 112 | 104 [920] 104 | 120 [1062] 98 | 142 [1257] 82 | 162 [1434] 67 | 175 [1549] 50 | 128 |
| | 20 [5.3] | 26 [230] 254 | 60 [531] 245 | 84 [743] 236 | 102 [903] 228 | 125 [1106] 215 | 144 [1274] 204 | 164 [1451] 190 | 183 [1619] 175 | 256 |
| | 30 [7.9] | 24 [212] 384 | 56 [496] 374 | 81 [717] 366 | 100 [885] 358 | 122 [1080] 346 | 142 [1257] 335 | 160 [1416] 318 | 175 [1549] 305 | 385 |
| | 40 [10.6] | 19 [168] 512 | 53 [469] 505 | 75 [664] 494 | 96 [850] 483 | 118 [1044] 473 | 140 [1239] 462 | 158 [1398] 450 | 170 [1504] 438 | 513 |
| | 50 [13.2] | 14 [124] 638 | 46 [407] 630 | 70 [619] 625 | 92 [814] 615 | 110 [973] 606 | 135 [1195] 593 | 156 [1381] 580 | 168 [1487] 568 | 641 |
| | 60 [15.8] | 10 [88] 768 | 42 [372] 762 | 66 [584] 756 | 86 [761] 748 | 106 [938] 738 | 128 [1133] 728 | 150 [1327] 717 | 164 [1451] 694 | 769 |
| | 70 [18.5] | 6 [53] 896 | 36 [319] 890 | 56 [496] 882 | 78 [690] 872 | 98 [867] 860 | 118 [1044] 846 | 140 [1239] 830 | 160 [1416] 816 | 897 |
| | 75 [19.8] | 3 [27] 960 | 27 [239] 955 | 50 [442] 948 | 74 [655] 938 | 92 [814] 926 | 113 [1000] 916 | 133 [1177] 896 | 148 [1310] 802 | 962 |
| Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/> | | | | | | | | | | |
| Theoretical Torque - Nm [lb-in] | | | | | | | | | | |
| Max. Cont. | 10.4 [410] | 37 [327] | 75 [664] | 100 [885] | 125 [1106] | 149 [1319] | 174 [1540] | 199 [1761] | 218 [1929] | |
| Max. Inter. | | | | | | | | | | |
| mm [in] | | | | | | | | | | |
| Displacement tested at 45°C [113°F] with an oil viscosity of 46cSt [213 SUS] | | | | | | | | | | |

► Performance data is typical. Performance of production units varies slightly from one motor to another.

DISPLACEMENT PERFORMANCE

| | | | | | | | | | | |
|------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------|-----------------|------------------|-------------------|-------------------|-------------------|-------------------|-----------------------------------------|-------------|
| 100 | | Pressure - bar [psi] | | | | | | | Max. Cont. | Max. Inter. |
| | | 30 [435] | 60 [870] | 80 [1160] | 100 [1450] | 120 [1740] | 140 [2030] | 160 [2320] | 175 [2540] | |
| 96 cm ³ [5.9 in ³] / rev | | Torque - Nm [lb-in], Speed rpm | | | | | | | Intermittent Ratings - 10% of Operation | |
| Max. Cont. | 5 [1.3] | 43 [381] 51 | 82 [726] 42 | 109 [965] 35 | 131 [1159] 25 | | | | | 52 |
| | 10 [2.6] | 43 [381] 99 | 84 [743] 93 | 108 [956] 84 | 133 [1177] 72 | 152 [1345] 62 | 180 [1593] 48 | 197 [1743] 24 | | 104 |
| | 20 [5.3] | 41 [363] 205 | 79 [699] 202 | 107 [947] 197 | 127 [1124] 192 | 154 [1363] 182 | 178 [1575] 172 | 200 [1770] 140 | 212 [1876] 118 | 208 |
| | 30 [7.9] | 39 [345] 311 | 74 [655] 307 | 101 [894] 301 | 126 [1115] 294 | 152 [1345] 283 | 176 [1558] 271 | 198 [1752] 258 | 213 [1885] 240 | 313 |
| | 40 [10.6] | 29 [257] 413 | 63 [558] 410 | 93 [823] 406 | 121 [1071] 399 | 150 [1327] 388 | 172 [1522] 379 | 195 [1726] 368 | 208 [1841] 347 | 417 |
| | 50 [13.2] | 20 [177] 519 | 52 [460] 515 | 85 [752] 510 | 115 [1018] 503 | 148 [1310] 492 | 169 [1496] 480 | 193 [1708] 464 | 203 [1796] 446 | 521 |
| | 60 [15.8] | 17 [150] 624 | 53 [469] 620 | 83 [735] 615 | 111 [982] 608 | 138 [1221] 600 | 165 [1460] 582 | 183 [1619] 565 | 193 [1708] 548 | 625 |
| | 70 [18.5] | 11 [97] 728 | 42 [372] 726 | 73 [646] 723 | 93 [823] 714 | 126 [1115] 706 | 159 [1407] 684 | 172 [1522] 668 | 183 [1619] 646 | 729 |
| Max. Inter. | 75 [19.8] | 6 [53] 780 | 35 [310] 771 | 61 [540] 764 | 89 [788] 755 | 118 [1044] 736 | 145 [1283] 724 | 156 [1381] 712 | 176 [1558] 699 | 781 |
| Rotor Width | | Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input checked="" type="checkbox"/> | | | | | | | | |
| 13.0 [510] | | Theoretical Torque - Nm [lb-in] | | | | | | | | |
| mm [in] | | 46 [407] | 92 [814] | 122 [1080] | 153 [1354] | 183 [1623] | 214 [1894] | 245 [2168] | 268 [2372] | |
| Displacement tested at 45°C [113°F] with an oil viscosity of 46cSt [213 SUS] | | | | | | | | | | |

| | | | | | | | | | | |
|------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------|-------------------|-------------------|-------------------|-------------------|-----------------------------------------|-------------|
| 125 | | Pressure - bar [psi] | | | | | | | Max. Cont. | Max. Inter. |
| | | 30 [435] | 60 [870] | 80 [1160] | 100 [1450] | 120 [1740] | 140 [2030] | 160 [2320] | 175 [2540] | |
| 125 cm ³ [7.6 in ³] / rev | | Torque - Nm [lb-in], Speed rpm | | | | | | | Intermittent Ratings - 10% of Operation | |
| Max. Cont. | 5 [1.3] | 52 [460] 38 | 95 [841] 35 | 135 [1195] 32 | 168 [1487] 27 | | | | | 40 |
| | 10 [2.6] | 50 [442] 78 | 98 [867] 74 | 138 [1221] 69 | 172 [1522] 62 | 190 [1681] 54 | 234 [2071] 45 | 258 [2283] 35 | | 80 |
| | 20 [5.3] | 50 [442] 158 | 96 [850] 152 | 132 [1168] 144 | 168 [1487] 135 | 202 [1788] 124 | 236 [2088] 110 | 256 [2265] 94 | 278 [2460] 78 | 160 |
| | 30 [7.9] | 44 [389] 238 | 92 [814] 232 | 126 [1115] 225 | 164 [1451] 215 | 198 [1752] 210 | 232 [2053] 198 | 262 [2319] 168 | 268 [2372] 155 | 240 |
| | 40 [10.6] | 35 [310] 319 | 82 [726] 316 | 118 [1044] 312 | 160 [1416] 308 | 193 [1708] 300 | 226 [2000] 288 | 252 [2230] 262 | 266 [2354] 238 | 320 |
| | 50 [13.2] | 31 [274] 399 | 77 [681] 396 | 108 [956] 392 | 155 [1372] 383 | 182 [1611] 368 | 220 [1947] 354 | 238 [2106] 338 | 262 [2319] 326 | 400 |
| | 60 [15.8] | 15 [133] 479 | 64 [566] 478 | 97 [858] 475 | 146 [1292] 470 | 166 [1469] 463 | 210 [1858] 454 | 224 [1982] 443 | 256 [2265] 434 | 480 |
| | 70 [18.5] | 8 [71] 559 | 50 [442] 555 | 90 [796] 548 | 140 [1239] 538 | 162 [1434] 524 | 204 [1805] 516 | 209 [1850] 500 | 236 [2088] 488 | 560 |
| Max. Inter. | 75 [19.8] | 40 [354] 599 | 71 [628] 594 | 128 [1133] 588 | 158 [1398] 576 | 192 [1699] 565 | 199 [1761] 536 | 224 [1982] 524 | 600 | |
| Rotor Width | | Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input checked="" type="checkbox"/> | | | | | | | | |
| 16.8 [660] | | Theoretical Torque - Nm [lb-in] | | | | | | | | |
| mm [in] | | 60 [531] | 119 [1053] | 159 [1407] | 199 [1761] | 239 [2115] | 279 [2469] | 318 [2814] | 348 [3080] | |
| Displacement tested at 45°C [113°F] with an oil viscosity of 46cSt [213 SUS] | | | | | | | | | | |

► Performance data is typical. Performance of production units varies slightly from one motor to another.



DISPLACEMENT PERFORMANCE

| | | | | | | | | | | |
|------------------------------------------------------------------------------|----------------------|------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|-------------|
| 160 | Pressure - bar [psi] | | | | | | | | Max. Cont. | Max. Inter. |
| | 30 [435] | 60 [870] | 80 [1160] | 100 [1450] | 120 [1740] | 140 [2030] | 160 [2320] | 175 [2540] | | |
| 160 cm ³ [9.4 in ³] / rev | | | | | | | | | | |
| Torque - Nm [lb-in], Speed rpm | | | | | | | | | | |
| Intermittent Ratings - 10% of Operation | | | | | | | | | | |
| Max. Cont. | 5 [1.3] | 56 [496] 30 | 112 [991] 25 | 154 [1363] 18 | 201 [1779] 10 | | | | | 32 |
| | 10 [2.6] | 58 [513] 63 | 115 [1018] 60 | 156 [1381] 56 | 205 [1814] 52 | 245 [2168] 48 | 285 [2522] 37 | | | 65 |
| Max. Inter. | 20 [5.3] | 60 [532] 128 | 123 [1089] 125 | 162 [1434] 121 | 202 [1788] 116 | 242 [2142] 110 | 282 [2496] 100 | 327 [2894] 86 | 360 [3186] 78 | 130 |
| | 30 [7.9] | 50 [443] 193 | 117 [1035] 190 | 157 [1389] 187 | 197 [1743] 183 | 238 [2106] 179 | 278 [2460] 173 | 322 [2850] 160 | 358 [3168] 144 | 194 |
| Max. Cont. | 40 [10.6] | 48 [425] 257 | 113 [1000] 255 | 155 [1372] 132 | 195 [1726] 248 | 236 [2089] 244 | 273 [2416] 239 | 318 [2814] 224 | 355 [3142] 211 | 258 |
| | 50 [13.2] | 32 [283] 323 | 106 [938] 320 | 149 [1319] 316 | 188 [1664] 312 | 235 [2080] 306 | 267 [2363] 299 | 313 [2770] 288 | 352 [3115] 275 | 323 |
| Max. Inter. | 60 [15.8] | 23 [204] 387 | 88 [779] 384 | 133 [1177] 380 | 178 [1575] 375 | 212 [1876] 371 | 260 [2301] 366 | 308 [2726] 358 | 342 [3027] 346 | 387 |
| | 70 [18.5] | 16 [142] 452 | 82 [726] 451 | 128 [1133] 448 | 170 [1505] 444 | 206 [1823] 436 | 255 [2257] 430 | 302 [2673] 423 | 331 [2929] 412 | 453 |
| | 75 [19.8] | 10 [89] 483 | 79 [699] 481 | 124 [1097] 477 | 164 [1451] 472 | 201 [1779] 466 | 248 [2195] 460 | 296 [2620] 450 | 319 [2823] 436 | 485 |
| Rotor Width | | | | | | | | | | |
| Theoretical Torque - Nm [lb-in] | | | | | | | | | | |
| 20.8 [820] | 74 [651] | 147 [1302] | 196 [1736] | 245 [2170] | 282 [2496] | 343 [3038] | 392 [3472] | 429 [3798] | | |
| mm [in] | | | | | | | | | | |
| Displacement tested at 45°C [113°F] with an oil viscosity of 46cSt [213 SUS] | | | | | | | | | | |

| | | | | | | | | | | |
|------------------------------------------------------------------------------|----------------------|------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|-------------|
| 200 | Pressure - bar [psi] | | | | | | | | Max. Cont. | Max. Inter. |
| | 30 [435] | 60 [870] | 80 [1160] | 100 [1450] | 115 [1670] | 140 [2030] | 150 [2180] | 175 [2540] | | |
| 190 cm ³ [11.6 in ³] / rev | | | | | | | | | | |
| Torque - Nm [lb-in], Speed rpm | | | | | | | | | | |
| Intermittent Ratings - 10% of Operation | | | | | | | | | | |
| Max. Cont. | 5 [1.3] | 75 [664] 25 | 158 [1398] 22 | 200 [1770] 20 | 241 [2133] 10 | | | | | 26 |
| | 10 [2.6] | 78 [690] 51 | 160 [1416] 49 | 204 [1805] 45 | 252 [2230] 39 | 291 [2575] 35 | 348 [3080] 29 | 377 [3336] 22 | | 53 |
| Max. Inter. | 20 [5.3] | 74 [655] 104 | 156 [1381] 102 | 200 [1770] 99 | 246 [2177] 95 | 293 [2593] 89 | 354 [3133] 83 | 380 [3363] 76 | 416 [3681] 65 | 105 |
| | 30 [7.9] | 70 [619] 157 | 152 [1345] 155 | 196 [1735] 152 | 240 [2124] 148 | 290 [2566] 143 | 352 [3115] 137 | 378 [3345] 130 | 420 [3717] 118 | 158 |
| Max. Cont. | 40 [10.6] | 65 [575] 210 | 147 [1301] 208 | 190 [1681] 205 | 228 [2018] 200 | 286 [2531] 193 | 340 [3009] 186 | 376 [3327] 178 | 418 [3699] 168 | 211 |
| | 50 [13.2] | 54 [478] 262 | 142 [1257] 260 | 180 [1593] 258 | 222 [1965] 254 | 277 [2451] 249 | 333 [2947] 243 | 356 [3150] 235 | 402 [3558] 223 | 263 |
| Max. Inter. | 60 [15.8] | 36 [319] 315 | 128 [1133] 313 | 166 [1469] 309 | 210 [1858] 305 | 266 [2354] 299 | 322 [2850] 293 | 350 [3097] 284 | 400 [3540] 268 | 316 |
| | 70 [18.5] | 15 [133] 367 | 102 [903] 365 | 158 [1398] 362 | 202 [1788] 358 | 254 [2248] 352 | 302 [2673] 336 | 327 [2894] 330 | 376 [3327] 316 | 368 |
| | 75 [19.8] | | 94 [832] 394 | 146 [1292] 390 | 194 [1717] 385 | 230 [2035] 380 | 290 [2566] 374 | 317 [2805] 365 | 364 [3221] 352 | 395 |
| Rotor Width | | | | | | | | | | |
| Theoretical Torque - Nm [lb-in] | | | | | | | | | | |
| 25.9 [1.020] | 91 [803] | 182 [1611] | 242 [2142] | 303 [2677] | 348 [3079] | 424 [3748] | 454 [4016] | 529 [4685] | | |
| mm [in] | | | | | | | | | | |
| Displacement tested at 45°C [113°F] with an oil viscosity of 46cSt [213 SUS] | | | | | | | | | | |

► Performance data is typical. Performance of production units varies slightly from one motor to another.

DISPLACEMENT PERFORMANCE

| | | | | | | | | | | | |
|---------------------------------------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|-------------|-----------------|
| 250 | | Pressure - bar [psi] | | | | | | | Max. Cont. | Max. Inter. | |
| | | 30 [435] | 60 [870] | 85 [1230] | 100 [1450] | 125 [1810] | 140 [2030] | 160 [2320] | 175 [2540] | | |
| 240 cm ³ [14.6 in ³] / rev | | Intermittent Ratings - 10% of Operation | | | | | | | | | |
| | | Torque - Nm [lb-in], Speed rpm | | | | | | | | | |
| Max. Cont. | Flow - lpm [gpm] | 5 [1.3] | 10 [2.6] | 20 [5.3] | 30 [7.9] | 40 [10.6] | 50 [13.2] | 60 [15.8] | 70 [18.5] | 75 [19.8] | Theoretical rpm |
| | 89 [788] | 194 [1717] | 264 [2336] | 326 [2885] | | | | | | 21 | |
| | 19 | 16 | 10 | 6 | | | | | | 42 | |
| | 92 [814] | 196 [1735] | 268 [2372] | 329 [2912] | 394 [3487] | | | | | 83 | |
| | 40 | 36 | 32 | 21 | 10 | | | | | 125 | |
| | 90 [796] | 192 [1699] | 264 [2336] | 321 [2841] | 397 [3513] | 445 [3938] | 510 [4513] | 554 [4903] | | 167 | |
| | 81 | 77 | 72 | 65 | 50 | 42 | 36 | 23 | | 208 | |
| | 86 [761] | 185 [1637] | 256 [2265] | 314 [2779] | 392 [3469] | 439 [3855] | 502 [4442] | 557 [4929] | | 250 | |
| 124 | 121 | 115 | 106 | 94 | 84 | 76 | 61 | | 292 | | |
| 82 [726] | 179 [1584] | 248 [2195] | 305 [2699] | 384 [3398] | 431 [3814] | 486 [4301] | 545 [4823] | | 313 | | |
| 165 | 162 | 158 | 153 | 144 | 135 | 125 | 113 | | | | |
| 69 [611] | 169 [1496] | 243 [2150] | 293 [2593] | 378 [3345] | 421 [3726] | 475 [4204] | 526 [4655] | | | | |
| 207 | 203 | 195 | 189 | 183 | 170 | 157 | 138 | | | | |
| 48 [425] | 152 [1345] | 230 [2035] | 282 [2496] | 364 [3221] | 407 [3602] | 456 [4035] | 508 [4496] | | | | |
| 250 | 247 | 243 | 236 | 222 | 216 | 205 | 188 | | | | |
| 37 [327] | 139 [1230] | 219 [1938] | 263 [2327] | 343 [3035] | 386 [3416] | 441 [3903] | 496 [4389] | | | | |
| 291 | 285 | 278 | 271 | 256 | 249 | 234 | 221 | | | | |
| 26 [230] | 128 [1133] | 205 [1814] | 245 [2168] | 328 [2903] | 374 [3310] | 428 [3788] | 481 [4257] | | | | |
| 312 | 310 | 307 | 302 | 294 | 270 | 254 | 242 | | | | |
| Rotor Width | | Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input checked="" type="checkbox"/> | | | | | | | | | |
| 32.5 [1.280] | | Theoretical Torque - Nm [lb-in] | | | | | | | | | |
| mm [in] | | 115 [1018] | 229 [2027] | 325 [2875] | 382 [3381] | 478 [4230] | 535 [4735] | 611 [5407] | 669 [5920] | | |
| | | Displacement tested at 45°C [113°F] with an oil viscosity of 46cSt [213 SUS] | | | | | | | | | |

| | | | | | | | | | | | |
|---------------------------------------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|-------------|-----------------|
| 315 | | Pressure - bar [psi] | | | | | | | Max. Cont. | Max. Inter. | |
| | | 30 [435] | 50 [725] | 70 [1015] | 85 [1230] | 100 [1450] | 120 [1740] | 140 [2030] | 160 [2320] | | |
| 303 cm ³ [18.5 in ³] / rev | | Intermittent Ratings - 10% of Operation | | | | | | | | | |
| | | Torque - Nm [lb-in], Speed rpm | | | | | | | | | |
| Max. Cont. | Flow - lpm [gpm] | 5 [1.3] | 10 [2.6] | 20 [5.3] | 30 [7.9] | 40 [10.6] | 50 [13.2] | 60 [15.8] | 70 [18.5] | 75 [19.8] | Theoretical rpm |
| | 123 [1089] | 200 [1770] | 282 [2496] | 344 [3044] | | | | | | 17 | |
| | 16 | 13 | 10 | 6 | | | | | | 33 | |
| | 117 [1035] | 194 [1717] | 277 [2451] | 342 [3027] | 399 [3531] | | | | | 66 | |
| | 31 | 29 | 25 | 21 | 17 | | | | | 99 | |
| | 112 [991] | 196 [1735] | 275 [2434] | 340 [3009] | 397 [3513] | 460 [4071] | 526 [4655] | 605 [5354] | | 132 | |
| | 64 | 62 | 58 | 54 | 49 | 43 | 32 | 23 | | 165 | |
| | 104 [920] | 183 [1620] | 267 [2363] | 322 [2850] | 390 [3452] | 448 [3965] | 520 [4602] | 602 [5328] | | 198 | |
| 98 | 94 | 90 | 85 | 79 | 70 | 62 | 56 | | 231 | | |
| 86 [761] | 168 [1487] | 252 [2230] | 304 [2690] | 365 [3230] | 440 [3894] | 515 [4558] | 588 [5204] | | 248 | | |
| 129 | 126 | 122 | 118 | 113 | 106 | 99 | 76 | | | | |
| 73 [646] | 156 [1381] | 238 [2106] | 288 [2549] | 350 [3098] | 424 [3752] | 500 [4425] | 571 [5053] | | | | |
| 164 | 160 | 155 | 150 | 144 | 136 | 127 | 119 | | | | |
| 60 [531] | 140 [1239] | 223 [1974] | 270 [2390] | 325 [2876] | 396 [3505] | 480 [4248] | 546 [4832] | | | | |
| 195 | 192 | 188 | 183 | 176 | 170 | 164 | 157 | | | | |
| 37 [327] | 122 [1080] | 186 [1646] | 254 [2248] | 309 [2735] | 368 [3257] | 455 [4027] | 527 [4664] | | | | |
| 228 | 226 | 223 | 218 | 212 | 206 | 196 | 188 | | | | |
| 23 [204] | 100 [885] | 174 [1540] | 237 [2097] | 293 [2593] | 359 [3177] | 444 [3929] | 516 [4567] | | | | |
| 245 | 242 | 238 | 233 | 228 | 222 | 215 | 206 | | | | |
| Rotor Width | | Overall Efficiency - 60 - 100% <input type="checkbox"/> 40 - 59% <input type="checkbox"/> 0 - 39% <input checked="" type="checkbox"/> | | | | | | | | | |
| 40.9 [1.610] | | Theoretical Torque - Nm [lb-in] | | | | | | | | | |
| mm [in] | | 145 [1283] | 241 [2133] | 338 [2991] | 410 [3628] | 482 [4265] | 579 [5124] | 675 [5973] | 772 [6832] | | |
| | | Displacement tested at 45°C [113°F] with an oil viscosity of 46cSt [213 SUS] | | | | | | | | | |

► Performance data is typical. Performance of production units varies slightly from one motor to another.



DISPLACEMENT PERFORMANCE

| | | | | | | | | | | | | | |
|-----------------------------------------------------------------------------------------------------------------------------------|-----------|---------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|------------|--|-------------|-----------------|
| 400 | | Pressure - bar [psi] | | | | | | | | Max. Cont. | | Max. Inter. | |
| | | 30 [435] | 45 [650] | 55 [800] | 65 [940] | 80 [1160] | 95 [1380] | 110 [1595] | 125 [1810] | | | | |
| 388 cm ³ [23.7 in ³] / rev | | | | | | | | | | | | | |
| Torque - Nm [lb-in], Speed rpm | | | | | | | | | | | | | |
| Intermittent Ratings - 10% of Operation | | | | | | | | | | | | | |
| Flow - lpm [gpm] | 5 [1.3] | 144 [1274] 11 | 220 [1947] 10 | 270 [2389] 7 | 338 [2991] 5 | | | | | | | 13 | Theoretical rpm |
| | 10 [2.6] | 146 [1292] 25 | 223 [1973] 23 | 272 [2407] 20 | 340 [3009] 16 | 412 [3646] 10 | 488 [4319] 6 | | | | | 26 | |
| | 20 [5.3] | 145 [1283] 51 | 219 [1938] 50 | 269 [2381] 48 | 333 [2347] 45 | 408 [3611] 40 | 484 [4283] 35 | 548 [4850] 27 | | | | 52 | |
| | 30 [7.9] | 138 [1221] 76 | 215 [1903] 75 | 262 [2319] 73 | 322 [2850] 70 | 402 [3558] 67 | 472 [4177] 59 | 546 [4832] 47 | 625 [5531] 36 | | | 77 | |
| | 40 [10.6] | 120 [1062] 103 | 204 [1805] 102 | 250 [2212] 100 | 310 [2743] 96 | 393 [3478] 89 | 458 [4053] 82 | 535 [4735] 73 | 618 [5469] 62 | | | 103 | |
| | 50 [13.2] | 100 [885] 129 | 186 [1646] 128 | 238 [2106] 125 | 295 [2611] 123 | 374 [3310] 119 | 446 [3947] 112 | 520 [4602] 102 | 600 [5310] 91 | | | 129 | |
| | 60 [15.8] | 76 [673] 155 | 166 [1469] 153 | 222 [1965] 150 | 282 [2496] 148 | 358 [3168] 143 | 427 [3779] 139 | 496 [4389] 130 | 576 [5097] 121 | | | 155 | |
| | 70 [18.5] | 50 [442] 179 | 145 [1283] 177 | 194 [1717] 174 | 250 [2212] 170 | 334 [2956] 165 | 402 [3558] 158 | 472 [4177] 152 | 540 [4779] 144 | | | 180 | |
| Max. Inter. | 75 [19.8] | 42 [372] 189 | 135 [1195] 187 | 176 [1558] 184 | 226 [2000] 180 | 306 [2708] 175 | 373 [3301] 167 | 445 [3938] 160 | 520 [4602] 150 | | | 190 | |
| Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/> | | | | | | | | | | | | | |
| Rotor Width | | | | | | | | | | | | | |
| 52.1 [2.050] mm [in] | | Theoretical Torque - Nm [lb-in] | | | | | | | | | | | |
| | | 185 [1640] | 278 [2460] | 340 [3007] | 402 [3554] | 494 [4374] | 587 [5194] | 680 [6014] | 772 [6834] | | | | |
| Displacement tested at 45°C [113°F] with an oil viscosity of 46cSt [213 SUS] | | | | | | | | | | | | | |



► Performance data is typical. Performance of production units varies slightly from one motor to another.

HOUSINGS

► Dimensions shown are without paint. Paint thickness can be up to 0.13 [0.005].



2-HOLE, SAE A MOUNT, ALIGNED PORTS

A10 1/2-14 NPT **A11** 7/8-14 UNF **A18** G 1/2 **A68** G 1/2 (TP)

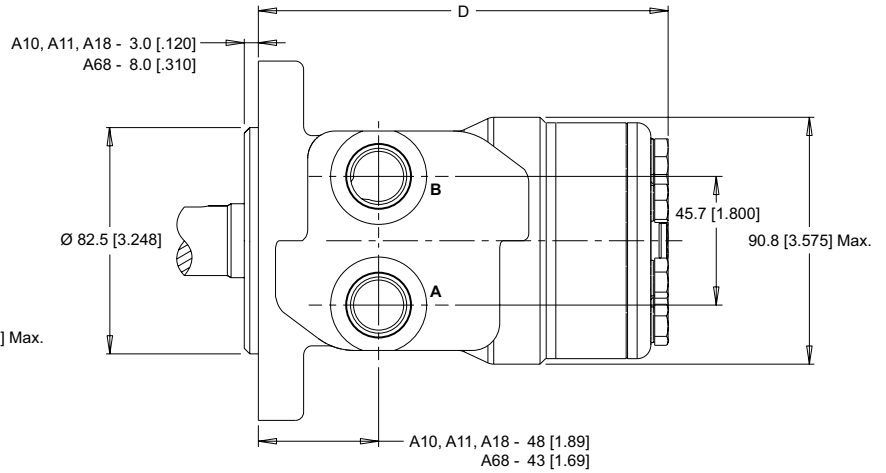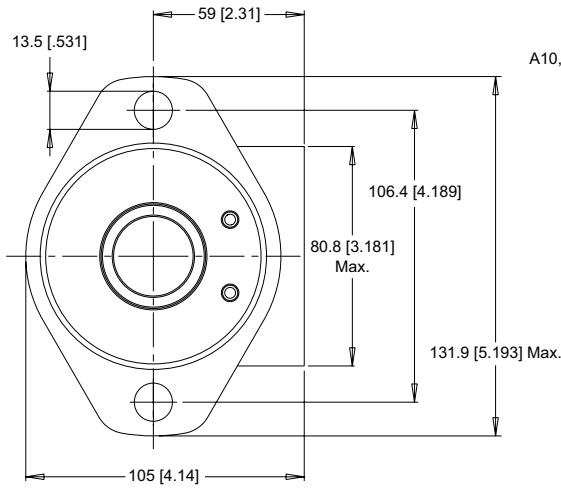



4-HOLE, MAGNETO MOUNT, ALIGNED PORTS

A30 1/2-14 NPT **A31** 7/8-14 UNF **AC8** G 1/2 (TP)

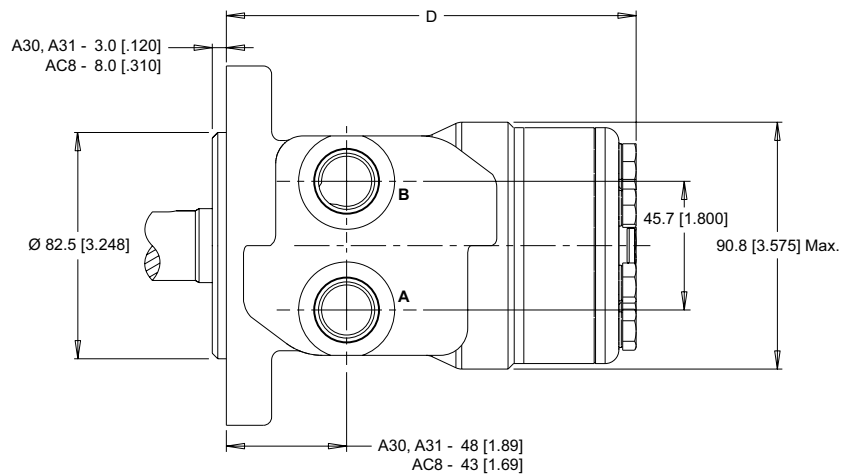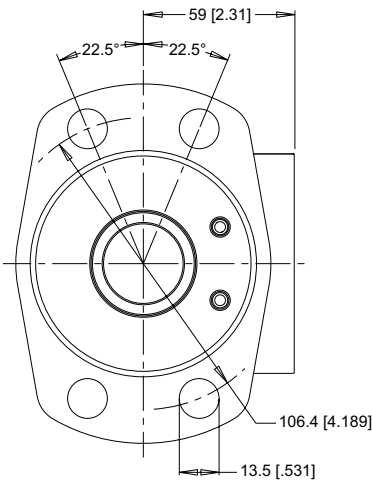

2-HOLE, SAE A MOUNT, OFFSET PORTS

A12 G 1/2 **A62** G 1/2 (TP) **A69** 7/8-14 UNF (TP)

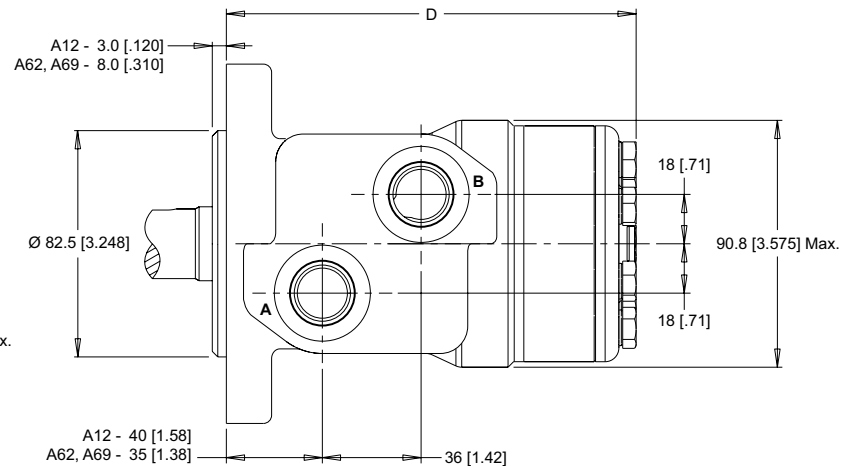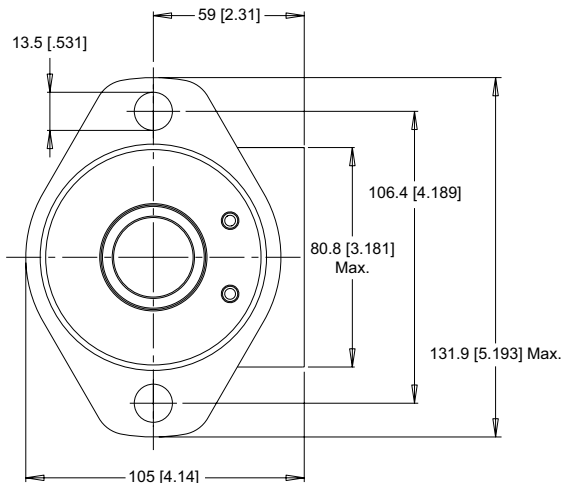



► Dimension D is charted on page 15. ► (TP) - Taller Pilot Height. Refer to detailed drawing for dimensional differences.

HOUSINGS

► Dimensions shown are without paint. Paint thickness can be up to 0.13 [.005].



4-HOLE, MAGNETO MOUNT, OFFSET PORTS

A32 G 1/2

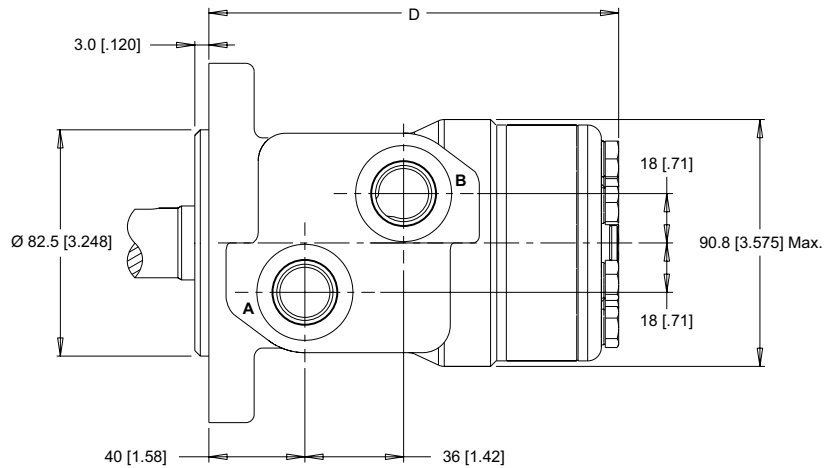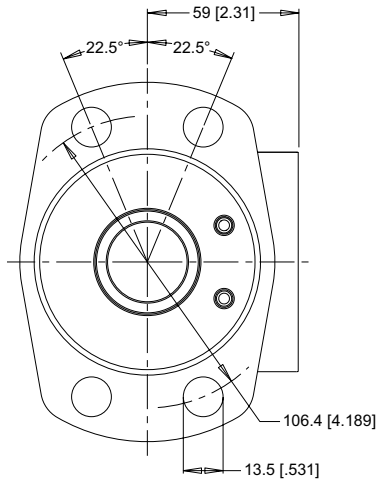



2-HOLE, SAE A MOUNT, ALIGNED MANIFOLD PORTS

A17 1/2" Drilled **G17** 1/2" Drilled

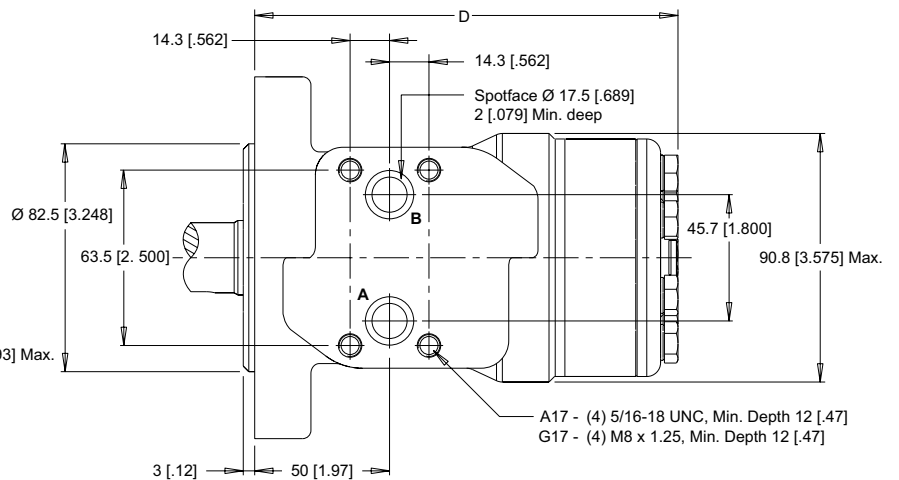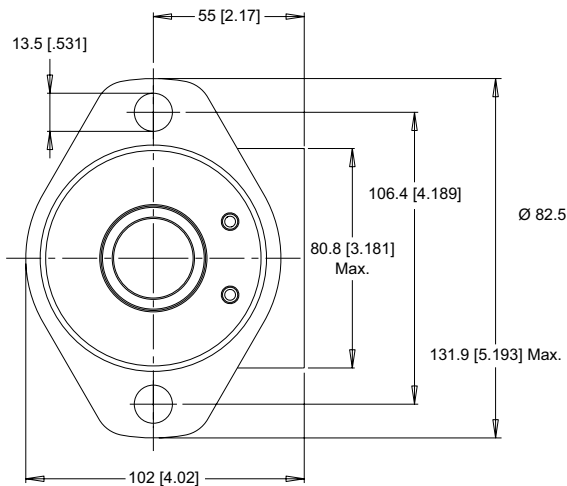

4-HOLE, MAGNETO MOUNT, ALIGNED MANIFOLD PORTS

A37 1/2" Drilled **AC7** 1/2" Drilled (TP)

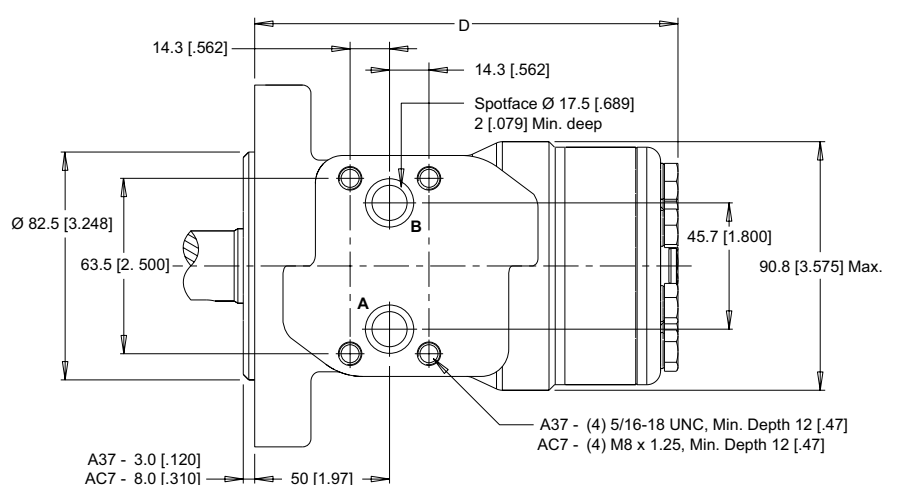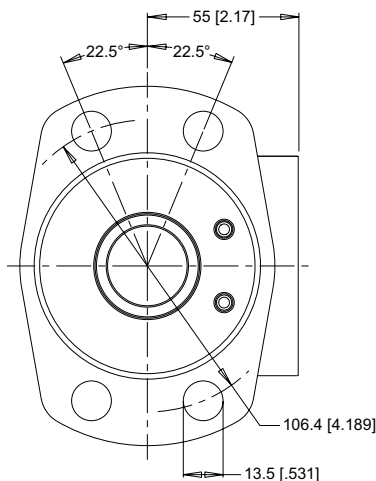

► Dimension D is charted on page 15. ► (TP) - Taller Pilot Height. Refer to detailed drawing for dimensional differences.



HOUSINGS

► Dimensions shown are without paint. Paint thickness can be up to 0.13 [0.005].

2-HOLE, SAE A MOUNT, OFFSET MANIFOLD PORTS

A13 G 1/2



A63 G 1/2 (TP)

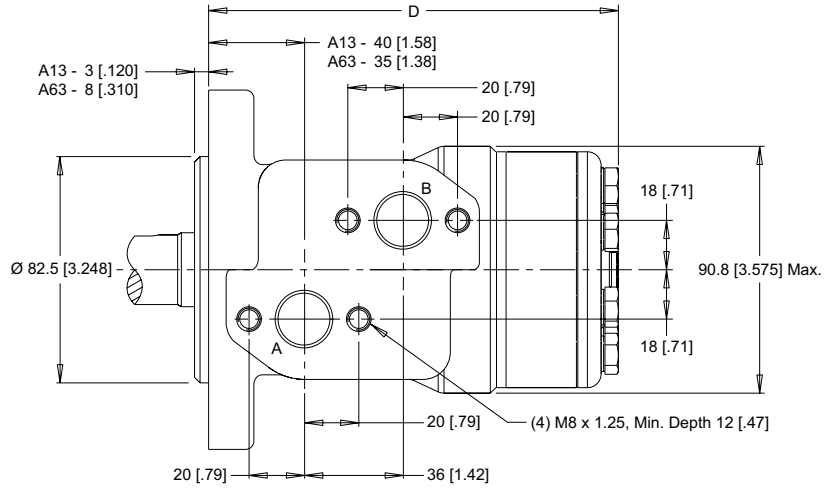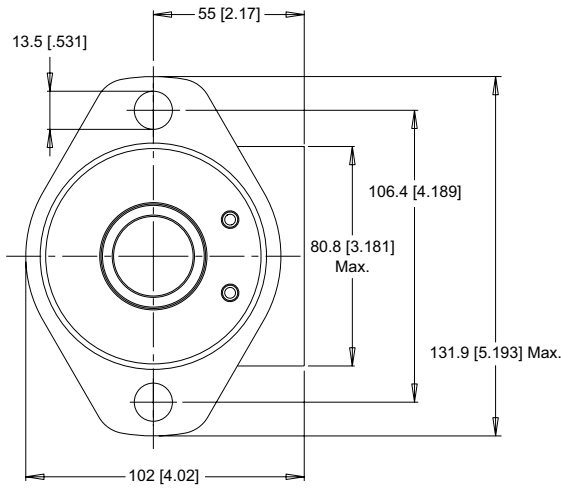

4-HOLE, MAGNETO MOUNT, OFFSET MANIFOLD PORTS

A3D 7/8-14 UNF

AC3 G 1/2 (TP)

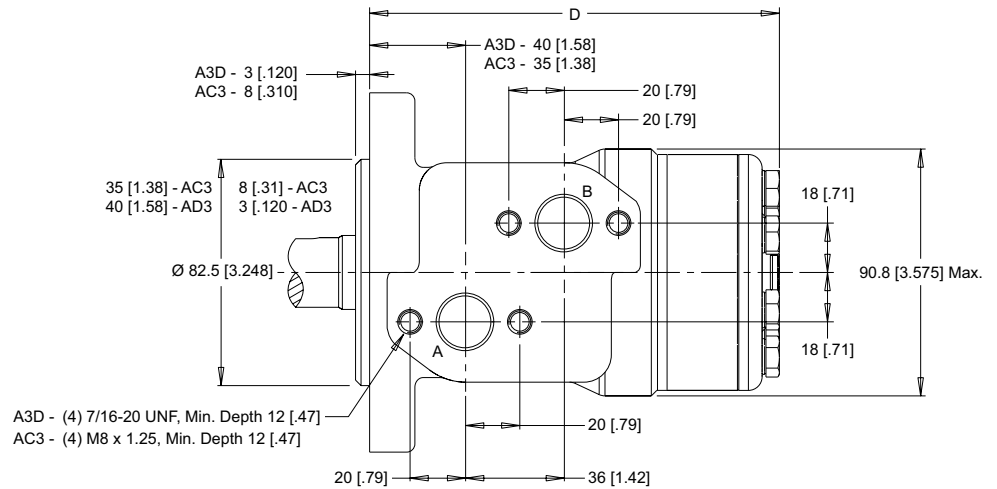
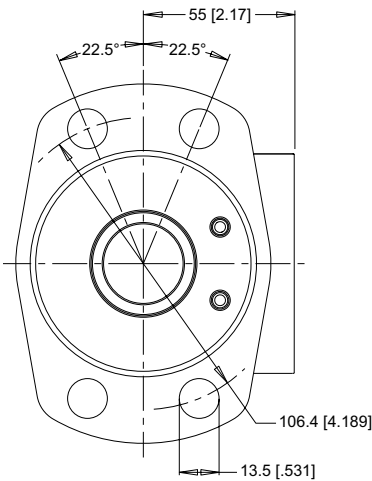


4-HOLE, SQUARE MOUNT, ALIGNED PORTS

F30 1/2-14 NPT

F31 7/8-14 UNF

F38 G 1/2

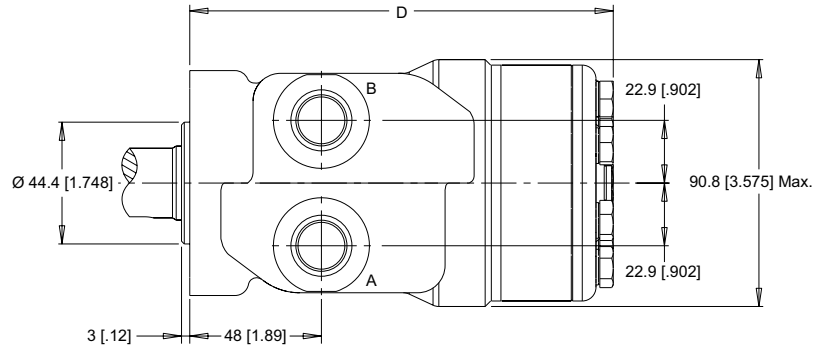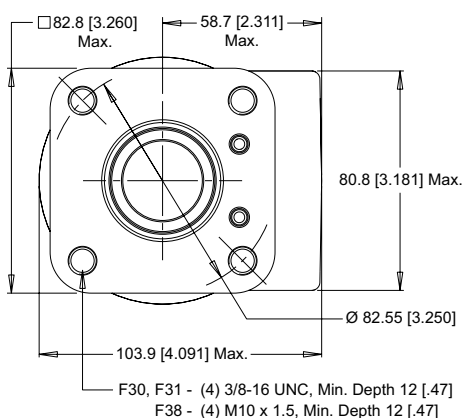


F30, F31 - (4) 3/8-16 UNC, Min. Depth 12 [0.47]
F38 - (4) M10 x 1.5, Min. Depth 12 [0.47]

► Dimension D is charted on page 15. ► (TP) - Taller Pilot Height. Refer to detailed drawing for dimensional differences.


HOUSINGS

► Dimensions shown are without paint. Paint thickness can be up to 0.13 [.005].

4-HOLE, SQUARE MOUNT, ALIGNED MANIFOLD PORTS **F37** 1/2" Drilled

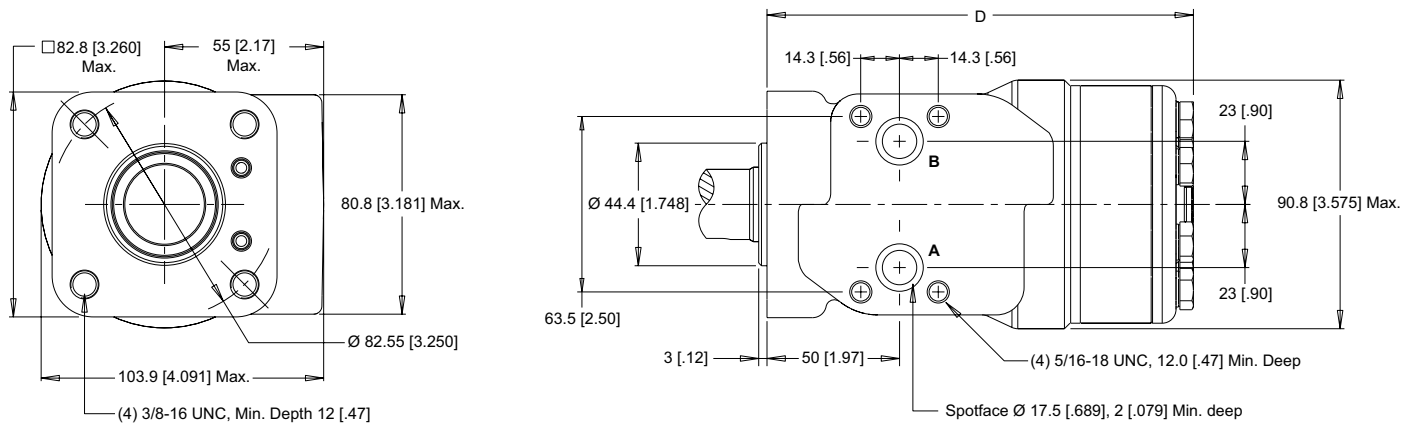


2-HOLE, SAE A MOUNT, OFFSET PORTS, VALVE CAVITY **A19** 7/8-14 UNF

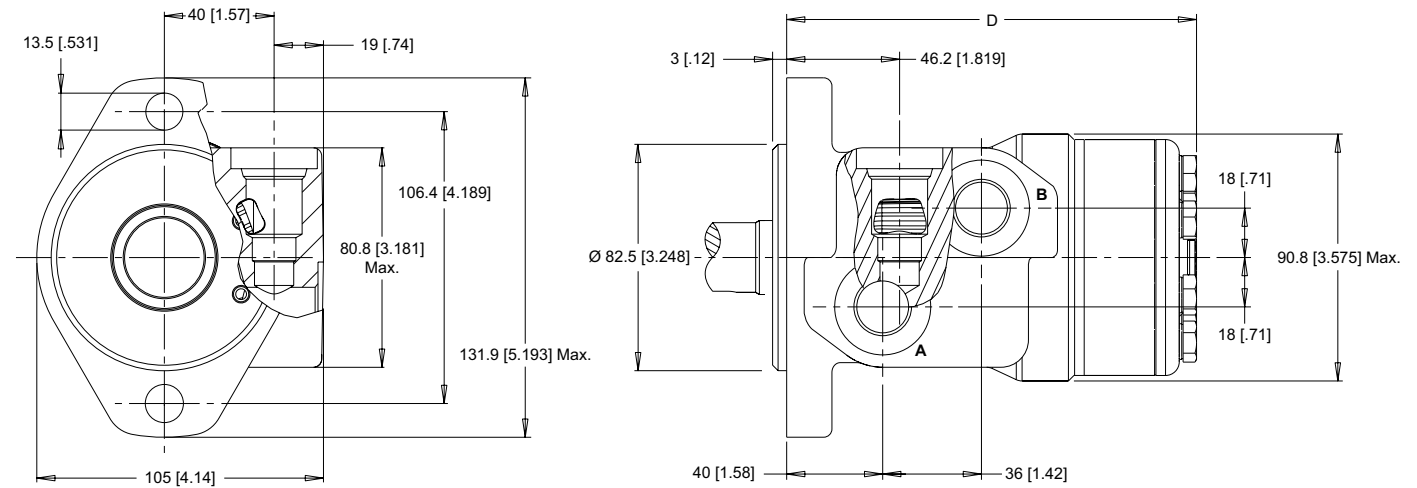

4-HOLE, MAGNETO MOUNT, OFFSET PORTS, VALVE CAVITY

A39 7/8-14 UNF **AC2** G 1/2 (TP)

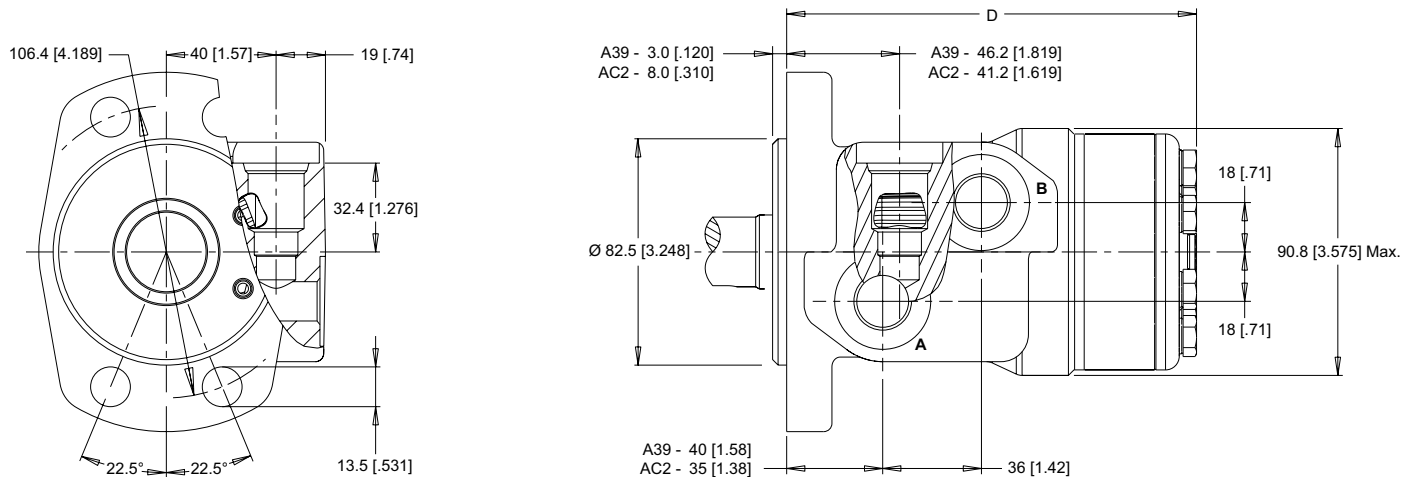


► Dimension D is charted on page 15. ► (TP) - Taller Pilot Height. Refer to detailed drawing for dimensional differences.

HOUSINGS


2-HOLE, SAE A MOUNT, ALIGNED END PORTS

A06 3/4-16 UNF **A08** G 1/2 **AP6** 3/4-16 UNF (TP) **AP8** G 1/2 (TP)

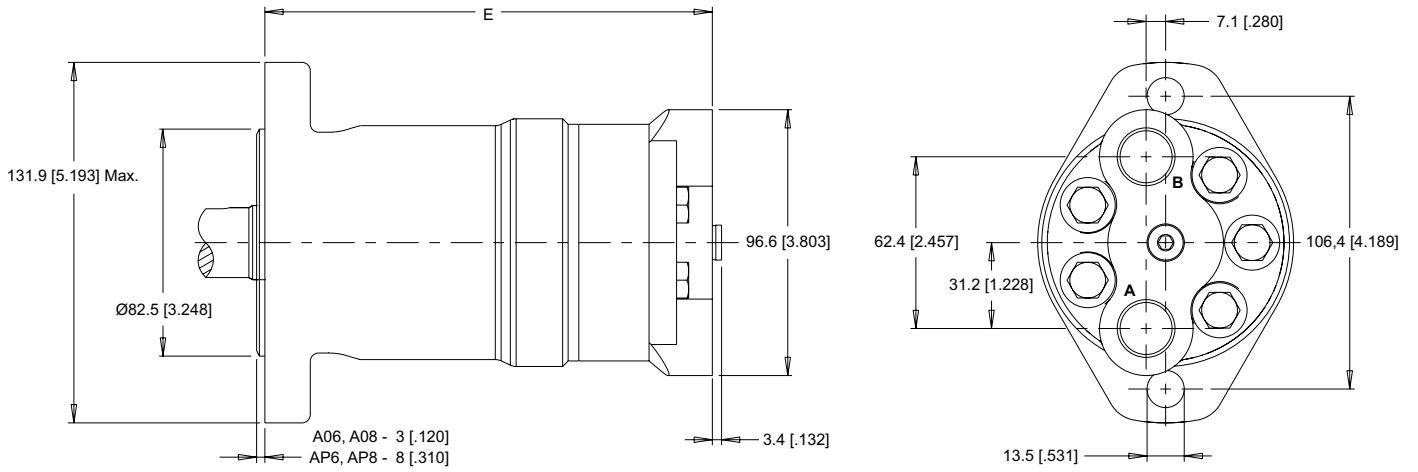

4-HOLE, SQUARE MOUNT, ALIGNED END PORTS

F21 7/8-14 UNF **F26** 3/4-16 UNF **G24** M22 x 1.5 **G28** G 1/2

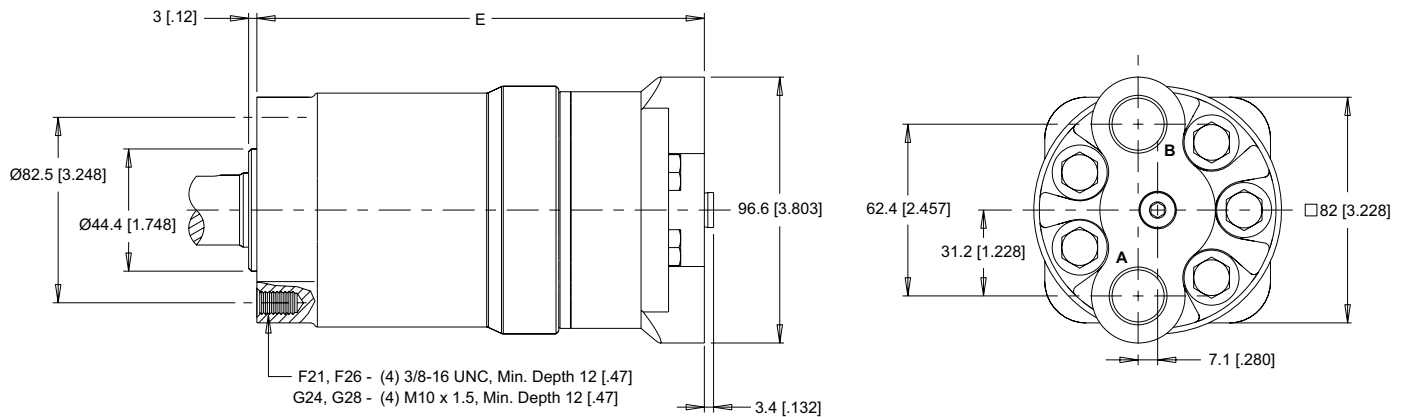


► Dimension E is charted on page 15. ► (TP) - Taller Pilot Height. Refer to detailed drawing for dimensional differences.

TECHNICAL INFORMATION


ALLOWABLE SHAFT LOAD / BEARING CURVE

The bearing curve below represents the side load capacity of the motor at the centerline of the key for various motor speeds. Operating conditions within the shaded area will maintain acceptable oil film lubrication with recommended fluids. Operating conditions outside the shaded area are susceptible to motor failure due to oil starvation and/or excessive heat generation. Fluids with low lubricity or low viscosity may require the maximum load and speed ratings to be derated to provide acceptable motor life and performance.

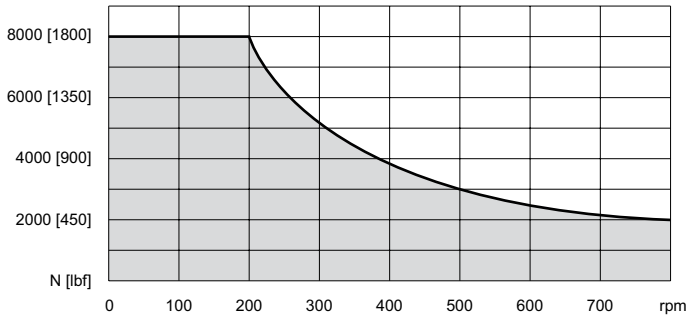


PERMISSIBLE SHAFT SEAL PRESSURE

The curve below represents allowable seal pressure at various speeds. Operation in the gray area results in maintaining the rated life of the shaft seal. Actual shaft seal pressure depends on motor configuration.

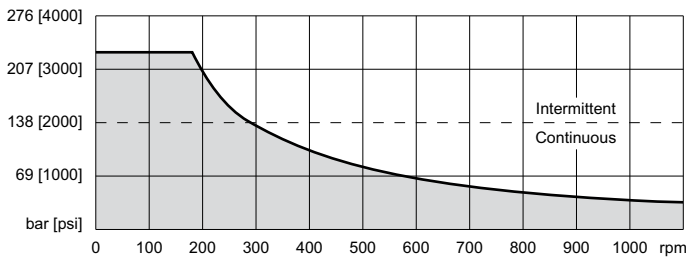

- ▶ With check valves and drain connection, the shaft seal pressure equals pressure in the drain line. With check valves and no drain connection, shaft seal pressure is identical to output pressure. No check valves and no drain connection, the shaft seal pressure is identical to the average value of input and output pressure.

THRUST LOAD

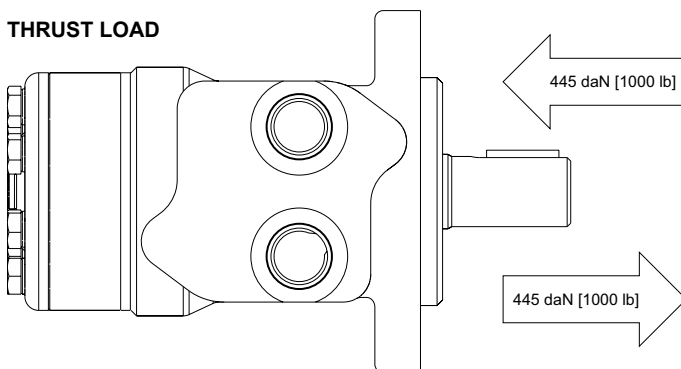

LENGTH & WEIGHT CHARTS

Dimension D is the overall motor length from the rear of the motor to the mounting flange surface and is referenced on detailed housing drawings listed on pages 10-13.

| D | 3mm Pilot | 8mm Pilot | Weight |
|-----|------------|------------|------------|
| # | mm [in] | mm [in] | kg [lb] |
| 025 | 133 [5.24] | 128 [5.04] | 6.3 [13.9] |
| 032 | 134 [5.28] | 129 [5.08] | 6.4 [14.1] |
| 040 | 136 [5.34] | 131 [5.16] | 6.5 [14.2] |
| 050 | 136 [5.34] | 131 [5.16] | 6.5 [14.2] |
| 060 | 137 [5.40] | 132 [5.20] | 6.5 [14.3] |
| 080 | 139 [5.49] | 134 [5.28] | 6.6 [14.5] |
| 100 | 142 [5.59] | 137 [5.39] | 6.7 [14.7] |
| 125 | 146 [5.74] | 141 [5.55] | 6.8 [14.9] |
| 160 | 150 [5.90] | 145 [5.71] | 6.9 [15.2] |
| 200 | 155 [6.10] | 150 [5.91] | 7.1 [15.6] |
| 250 | 162 [6.36] | 157 [6.18] | 7.3 [16.1] |
| 315 | 170 [6.69] | 165 [6.50] | 7.6 [16.7] |
| 400 | 181 [7.13] | 176 [6.93] | 7.9 [17.5] |


Dimension E is the overall motor length from the rear of the motor to the mounting flange surface and is referenced on detailed housing drawings listed on pages 14.

| E | 3mm Pilot | 8mm Pilot | Weight |
|-----|------------|------------|------------|
| # | mm [in] | mm [in] | kg [lb] |
| 025 | 144 [5.67] | 139 [5.47] | 5.9 [13.0] |
| 032 | 145 [5.71] | 140 [5.51] | 6.0 [13.2] |
| 040 | 146 [5.75] | 141 [5.55] | 6.1 [13.4] |
| 050 | 146 [5.75] | 141 [5.55] | 6.1 [13.4] |
| 060 | 148 [5.83] | 143 [5.63] | 6.1 [13.4] |
| 080 | 150 [5.91] | 145 [5.71] | 6.2 [13.6] |
| 100 | 153 [6.02] | 148 [5.83] | 6.3 [13.9] |
| 125 | 157 [6.18] | 152 [5.98] | 6.4 [14.1] |
| 160 | 161 [6.33] | 156 [6.14] | 6.5 [14.3] |
| 200 | 166 [6.54] | 161 [6.34] | 6.7 [14.7] |
| 250 | 173 [6.81] | 168 [6.61] | 6.9 [15.2] |
| 315 | 181 [7.13] | 176 [6.93] | 7.2 [15.8] |
| 400 | 192 [7.56] | 187 [7.36] | 7.5 [16.5] |

- ▶ The overall motor weights listed in each chart above were calculated using the heaviest of the housing options associated with that mounting flange to end of motor dimension. 155 & 156 series motor weights can vary ± 0.5 kg [1 lb] depending on model configurations such as housing, shaft, endcover, options etc.


SHAFTS

01 7/8" 13 Tooth Spline

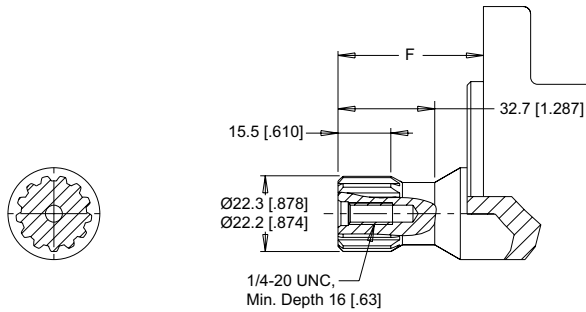


Max. Torque: 170 Nm [1500 lb-in]

12 25mm Straight



Max. Torque: 655 Nm [5800 lb-in]

16 25mm Straight Extended

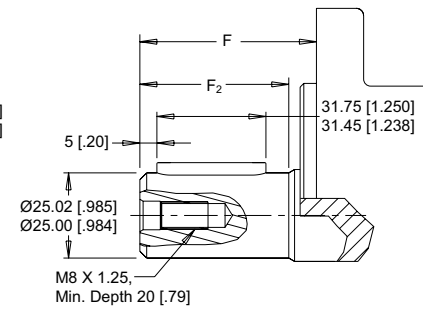


02 1" 6B Spline, 1/4-20 Tap

04 1" 6B Spline, M8x1.25 Tap


F3 1" 6B Spline, M8x1.25 Tap

02, 04 - 6B Spline
SAE J499 Standard
F3 - 6B Spline
B.S. 2059 Standard

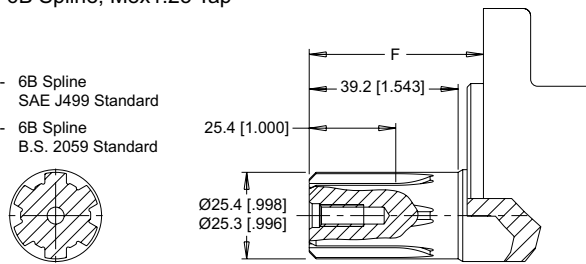

Max. Torque: 678 Nm [6000 lb-in]

B1 1" Straight, Woodruff Key

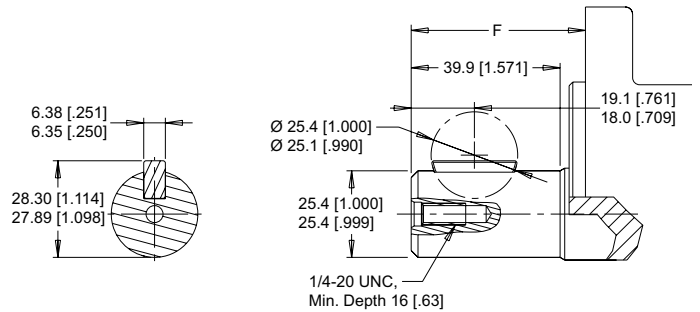


Max. Torque: 655 Nm [5800 lb-in]

05 1" - 9.5 [.375] Pinhole

53 1" - 10.3 [.406] Pinhole


66 1" - 8.0 [.315] Pinhole

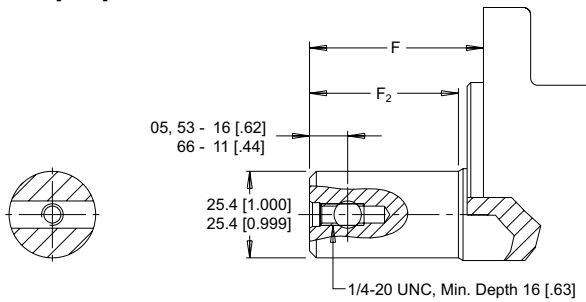

Max. Torque: 678 Nm [6000 lb-in]

10 1" Straight

15 1" Straight Extended

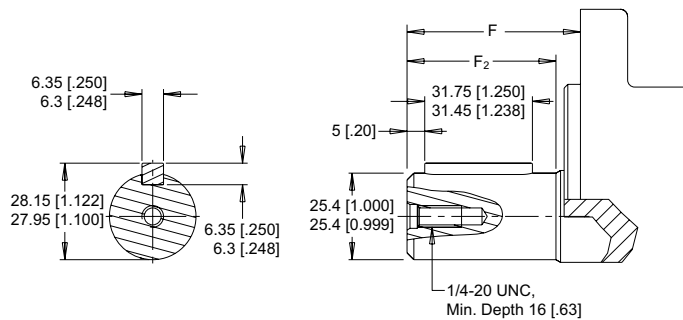

Max. Torque: 655 Nm [5800 lb-in]

MOUNTING / SHAFT LENGTH CHART


Dimension F is the overall distance from the motor mounting surface to the end of the shaft.

Additional shaft length information, if necessary, is noted as F₂ and does not increase or decrease the listed F dimensions in this chart. The overall shaft lengths are already factored into the overall distance from the mounting surface to the end of the shaft.

| F | 3mm Pilot | 8mm Pilot | F ₂ |
|----|--------------|--------------|----------------|
| # | mm [in] | mm [in] | mm [in] |
| 01 | 43.3 [1.705] | 48.3 [1.902] | N/A |
| 02 | 45.3 [1.783] | 50.3 [1.980] | N/A |
| 04 | 45.3 [1.783] | 50.3 [1.980] | N/A |
| 05 | 45.3 [1.783] | 50.3 [1.980] | 39.2 [1.543] |
| 10 | 45.3 [1.783] | 50.3 [1.980] | 39.2 [1.543] |
| 12 | 50.3 [1.980] | 55.3 [2.177] | 44.2 [1.740] |
| 15 | 62.1 [2.445] | 67.1 [2.642] | 56.0 [2.205] |
| 16 | 62.6 [2.464] | 67.6 [2.661] | 56.5 [2.225] |
| 53 | 45.3 [1.783] | 50.3 [1.980] | 39.2 [1.543] |
| 66 | 50.3 [1.980] | 55.3 [2.177] | 44.2 [1.740] |
| B1 | 45.3 [1.783] | 50.3 [1.980] | N/A |




ORDERING INFORMATION



1. CHOOSE SERIES DESIGNATION

- 155** Clockwise Rotation
- 156** Counterclockwise Rotation

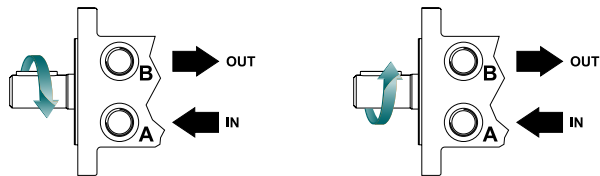

► The 155 & 156 series are bi-directional. Reversing the inlet hose will reverse shaft rotation.

2. SELECT A DISPLACEMENT OPTION

| | | | |
|------------|----------------------------------------------------|------------|------------------------------------------------------|
| 025 | 25 cm ³ /rev [1.5 in ³ /rev] | 125 | 125 cm ³ /rev [7.6 in ³ /rev] |
| 032 | 32 cm ³ /rev [2.0 in ³ /rev] | 160 | 154 cm ³ /rev [9.4 in ³ /rev] |
| 040 | 40 cm ³ /rev [2.5 in ³ /rev] | 200 | 190 cm ³ /rev [11.6 in ³ /rev] |
| 050 | 50 cm ³ /rev [3.0 in ³ /rev] | 250 | 240 cm ³ /rev [14.6 in ³ /rev] |
| 060 | 59 cm ³ /rev [3.6 in ³ /rev] | 315 | 303 cm ³ /rev [18.5 in ³ /rev] |
| 080 | 78 cm ³ /rev [4.8 in ³ /rev] | 400 | 388 cm ³ /rev [23.7 in ³ /rev] |
| 100 | 96 cm ³ /rev [5.9 in ³ /rev] | | |

3. SELECT A MOUNT & PORT OPTION

| | |
|------------|------------------------------------------------------------------|
| A06 | 2-Hole, SAE A Mount, Aligned End Ports, 3/4-16 UNF |
| A08 | 2-Hole, SAE A Mount, Aligned End Ports, G 1/2 |
| AP6 | 2-Hole, SAE A Mount, Aligned End Ports, 3/4-16 UNF (TP) |
| AP8 | 2-Hole, SAE A Mount, Aligned End Ports, G 1/2 (TP) |
| A10 | 2-Hole, SAE A Mount, Aligned Ports, 1/2-14 NPT |
| A11 | 2-Hole, SAE A Mount, Aligned Ports, 7/8-14 UNF |
| A12 | 2-Hole, SAE A Mount, Offset Ports, G 1/2 |
| A13 | 2-Hole, SAE A Mount, Offset Manifold Ports, G 1/2 |
| A17 | 2-Hole, SAE A Mount, Aligned Manifold Ports, 1/2" Drilled |
| A18 | 2-Hole, SAE A Mount, Aligned Ports, G 1/2 |
| A19 | 2-Hole, SAE A Mount, Offset Ports, Valve Cavity 7/8-14 UNF |
| A30 | 4-Hole, Magneto Mount, Aligned Ports, 1/2-14 NPT |
| A31 | 4-Hole, Magneto Mount, Aligned Ports, 7/8-14 UNF |
| A32 | 4-Hole, Magneto Mount, Offset Ports, G 1/2 |
| A37 | 4-Hole, Magneto Mount, Aligned Manifold Ports, 1/2" Drilled |
| A39 | 4-Hole, Magneto Mount, Offset Ports, Valve Cavity 7/8-14 UNF |
| A3D | 4-Hole, Magneto Mount, Offset Manifold Ports, 7/8-14 UNF |
| A62 | 2-Hole, SAE A Mount, Offset Ports, G 1/2 (TP) |
| A63 | 2-Hole, SAE A Mount, Offset Manifold Ports, G 1/2 (TP) |
| A68 | 2-Hole, SAE A Mount, Aligned Ports, G 1/2 (TP) |
| A69 | 2-Hole, SAE A Mount, Offset Ports, 7/8-14 UNF (TP) |
| AC2 | 4-Hole, Magneto Mount, Offset Ports, G 1/2 (TP) |
| AC3 | 4-Hole, Magneto Mount, Offset Manifold Ports, G 1/2 (TP) |
| AC7 | 4-Hole, Magneto Mount, Aligned Manifold Ports, 1/2" Drilled (TP) |

► (TP) - Tall pilot. Speed sensor option is not available on tall pilot housings.

3. SELECT A MOUNT & PORT OPTION

| | |
|------------|------------------------------------------------------------|
| AC8 | 4-Hole, Magneto Mount, Aligned Ports, G 1/2 (TP) |
| F21 | 4-Hole, Square Mount, Aligned End Ports, 7/8-14 UNF |
| F26 | 4-Hole, Square Mount, Aligned End Ports, 3/4-16 UNF |
| F30 | 4-Hole, Square Mount, Aligned Ports, 1/2-14 NPT |
| F31 | 4-Hole, Square Mount, Aligned Ports, 7/8-14 UNF |
| F37 | 4-Hole, Square Mount, Aligned Manifold Ports, 1/2" Drilled |
| F38 | 4-Hole, Square Mount, Aligned Ports, G 1/2 |
| G17 | 2-Hole, SAE A Mount, Aligned Manifold Ports, 1/2" Drilled |
| G24 | 4-Hole, Square Mount, Aligned End Ports, M22 x 1.5 |
| G28 | 4-Hole, Square Mount, Aligned End Ports, G 1/2 |

4. SELECT A SHAFT OPTION

| | | | |
|-----------|---------------------------|-----------|---------------------------|
| 01 | 7/8" 13 Tooth Spline | 15 | 1" Straight Extended |
| 02 | 1" 6B Spline, 1/4-20 Tap | 16 | 25mm Straight Extended |
| 04 | 1" 6B Spline, M8x1.25 Tap | 53 | 1" - 10.3 [.406] Pinhole |
| 05 | 1" - 9.5 [.375] Pinhole | 66 | 1" - 8.0 [.315] Pinhole |
| 10 | 1" Straight | B1 | 1" Straight, Woodruff Key |
| 12 | 25mm Straight | F3 | 1" 6B Spline, M8x1.25 Tap |

► The 15 & 16 extended shafts are designed for use with one of the speed sensor options listed in STEP 7.

5. SELECT A PAINT OPTION

| | |
|----------|-----------------------------------|
| A | Black |
| B | Black, Unpainted Mounting Surface |

6. SELECT A VALVE CAVITY / CARTRIDGE OPTION

| | | | |
|----------|---------------------------|----------|---------------------------|
| A | None | F | 121 bar [1750 psi] Relief |
| B | Valve Cavity Only | G | 138 bar [2000 psi] Relief |
| C | 69 bar [1000 psi] Relief | J | 173 bar [2500 psi] Relief |
| D | 86 bar [1250 psi] Relief | L | 207 bar [3000 psi] Relief |
| E | 104 bar [1500 psi] Relief | | |

► Valve cavity is only available on the A19, A39 & AC2 housings.

7. SELECT AN ADD-ON OPTION

| | |
|----------|--------------------------------------------------------|
| A | Standard |
| B | Lock Nut |
| C | Solid Hex Nut |
| W | Speed Sensor, Dual, 4-Pin Male Weatherpack Connector |
| X | Speed Sensor, Dual, 4-Pin M12 Male Connector |
| Y | Speed Sensor, Single, 3-Pin Male Weatherpack Connector |
| Z | Speed Sensor, Single, 4-Pin M12 Male Connector |

8. SELECT A MISCELLANEOUS OPTION

| | | | |
|-----------|-------------------|-----------|---------------------------|
| AA | None | FB | No Check Valves Installed |
| AC | Freeturning Rotor | | |

North America

White Drive Products, Inc.
P.O. Box 1127
Hopkinsville, KY. USA 42241
Phone: +1.270.885.1110
Fax: +1.270.886.8462
infousa@whitedriveproducts.com

Europe

White Drive Products GmbH
Mannsnetterstrasse 34
D-88145 Opfenbach, Germany
Phone: +49.8385.924988.0
Fax: +49.8385.924988.9
infoeu@whitedriveproducts.com

Asia

White (China) Drive Products Co., Ltd.
1-8 Ning Zhen Gong Lu
Zhenjiang, 212021, Jiangsu, China
Phone: +86 511 5729988
Fax: +86 511 5728921
infochina@whitedriveproducts.com

Delivering The Power
To Get Work Done!



whitedriveproducts