


// BALL VALVE

A complete range to fit low and high pressure lines. Shock-resistant, engineered to be used in harsh environments, they can have connections to pipes or hoses, according to the specific applications demands.

// 2-WAY BALL VALVE

Series BKH-MKH DIN-ISO 1219
BSP Female
(NPTF female also available)

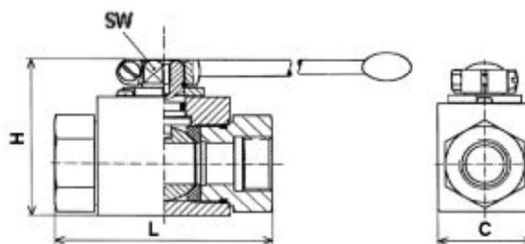


Part Number	ID mm	ID in	ID dash size	Thread size	WP Mpa	WP psi	L mm	C mm	H mm	SW
R1VBKH0006-G041	6	1/4	4	1/4-19	50	7250	69	26	47	9
R1VBKH0010-G061	10	3/8	6	3/8-19	50	7250	72	32	52	9
R1VBKH0013-G081	13	1/2	8	1/2-14	50	7250	83	35	54	9
R1VBKH0020-G121	20	3/4	12	3/4-14	31,5	4550	35	49	75	14
R1VBKH0025-G201	25	1	16	1 1/4-11	31,5	4550	120	58	83	14
R1VBKH0025-G161	25	1	16	1-11	31,5	4550	113	58	83	14
R1VMKH0032-G205	32	1 1/4	20	1 1/4-11	35	5050	111	81	107	17
R1VMKH0040-G245	40	1 1/2	24	1 1/2-11	35	5050	130	100	124	17
R1VMKH0050-G325	50	2	32	2-11	35	5050	140	118	138	17

Stainless steel version available on request

// 3-WAY BALL VALVE

Series BK3 DIN 2429
BSP Female
(NPTF female also available)

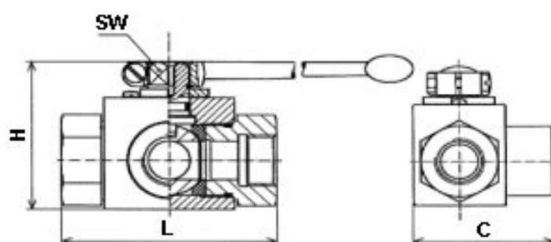

Part Number	ID mm	ID in	ID dash size	Thread size	WP Mpa	WP psi	L mm	C mm	H mm	SW
R1VBK3L006-G042	6	1/4	4	1/4-19	31,5	4550	69	48	47	9
R1VBK3L010-G062	10	3/8	6	3/8-19	31,5	4550	72	52	52	9
R1VBK3L013-G082	13	1/2	8	1/2-14	31,5	4550	83	59	54	9
R1VBK3L020-G122	20	3/4	12	3/4-14	31,5	4550	95	72	75	14
R1VBK3L025-G162	25	1	16	1-11	31,5	4550	113	90	83	14

Stainless steel version available on request