


TCLS/Z

Filling plug with dipstick and breather

- ▶ Threaded plug with knurled round head for hand-tightening.
- ▶ Hole for venting internal pressure.
- ▶ Built-in dipstick.
- ▶ Available in various max. and min. notches and lengths on request.
- ▶ For applications requiring extratight sealing, type LSF is recommended.

TYPE	CODE	GAS	h	f	l	g	d
TCLS/Z1G	1GLSZ10A	1/4"	12	8	120	5	22
TCLS/Z2G	1GLSZ20A	3/8"	13,5	10	170	5	26
TCLS/Z3G	1GLSZ30A	1/2"	16,5	10	170	5	30
TCLS/Z4G	1GLSZ40A	3/4"	20	12	200	5	40
TCLS/Z5G	1GLSZ50A	1"	21,5	14	200	5	45
TCLS/Z6G	1GLSZ60A	1" 1/4	20	15	250	5	55
TCLS/Z7G	1GLSZ70A	1" 1/2	20	15	250	5	55
TCLS/Z8G	1GLSZ80A	2"	20	17	250	5	70

TYPE	CODE	MB series	h	f	l	g	d
TCLS/Z1M	1MLSZ10A	14 x 1,5	12	8	120	5	22
TCLS/Z2M	1MLSZ20A	16 x 1,5	12	10	170	5	26
TCLS/Z3M	1MLSZ30A	18 x 1,5	12	10	170	5	26
TCLS/Z4M	1MLSZ40A	20 x 1,5	15	10	170	5	30
TCLS/Z5M	1MLSZ50A	22 x 1,5	15	10	170	5	30
TCLS/Z6M	1MLSZ60A	24 x 2	15	12	200	5	36
TCLS/Z7M	1MLSZ70A	30 x 2	20	12	200	5	42
TCLS/Z8M	1MLSZ80A	33 x 2	21,5	14	200	5	45

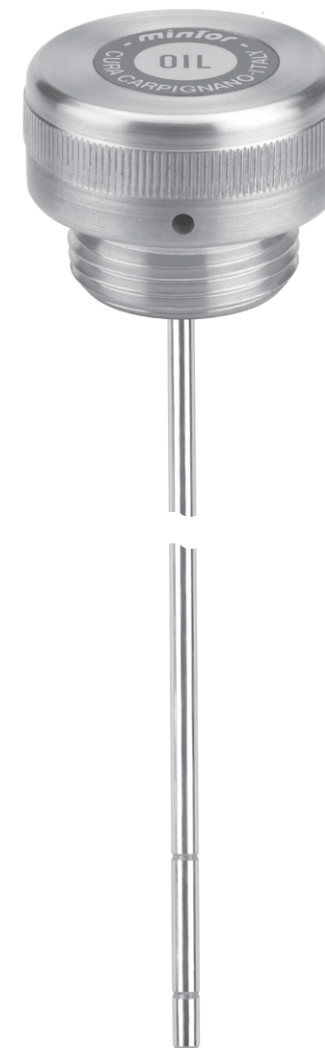

the safety of metal

[PRINTING NOTES](#)
[PRINT](#)