

Flow Divider

Bi-directional
Series MTD A



- Robust, simple and reliable
- Easy to service
- Flows can be split or merged with accuracy (divide/combine functions).
- The flow division ratio can be altered to suit customer requirements.

1 Description

1.1 General


Series MTD A units are flow dividing valves that operate automatically. They are intended for use with hydraulic fluids. They divide a flow, the total rate of which may be varied, into two usually equal parts. When flow passes through a valve in the opposite direction, the two part-flows are combined into one single flow (added). The dividing and combining functions are largely independent of the pressures of the two divided flows and of the fluid viscosity. If the valve has an unequal division ratio, the larger part-flow must always

be through port B. In order for the valve to work properly, a continuous flow is required at all ports. For example, if one actuator is no longer able to move, then the other part-flow will also be restricted. If the two actuators served by the flow divider operate at different pressures, then the pressure of the total flow entering the valve will correspond to the higher of the two actuator pressures. Large pressure differences may give rise to significant heat generation, which must be taken into consideration when designing the system.

1.2 Application examples

- Work access platforms
- Lifting platform
- Harvesters
- Municipal equipment
- Snow/ice clearing equipment
- Wood chippers
- Road rollers
- Tail lifts

2 Symbols




3 Technical data

General characteristics	Description, value, unit
Maximum operating pressure	315 bar
Oil temperature range	-20 °C ... +80 °C
Viscosity range	10 mm ² /s ... 300 mm ² /s
Minimum fluid cleanliness	ISO 4406 class 20/18/14 (NAS 1638 class 9)
Nitrile seals	NBR (Nitril-Butadin-Kautschuk)

4 Characteristic curves


4.1 Pressure drop characteristics (Δp)

Pressure drop v. flow rate with oil viscosity of 35 mm²/s (Q_{In} 100% = Q_{Nom})

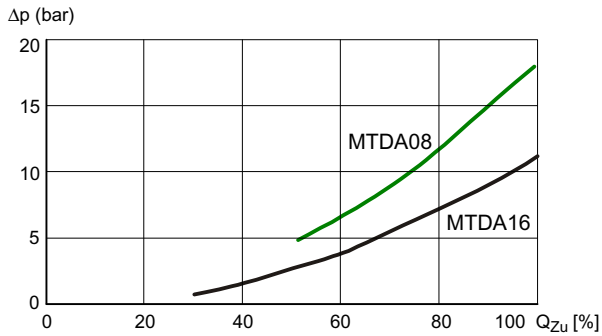

4.2 Division accuracy [%]


Division accuracy + 3 % of the max. flow rate, based on nominal volume flow range of the respective flow divider (see example abs. 6.2) with oil viscosity of 35 mm²/s (Q_{In} 100% = Q_{Nom})

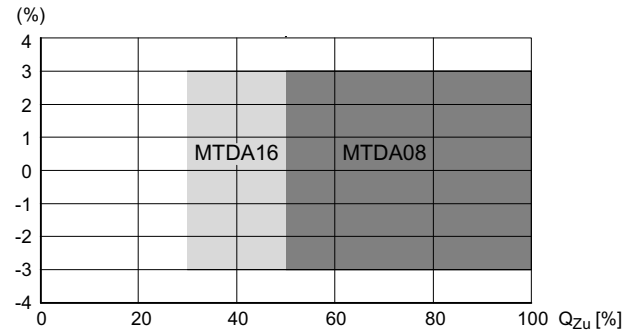


IMPORTANT :
Higher division accuracy on enquiry

5 Dimensions in mm

5.1 MTDA08

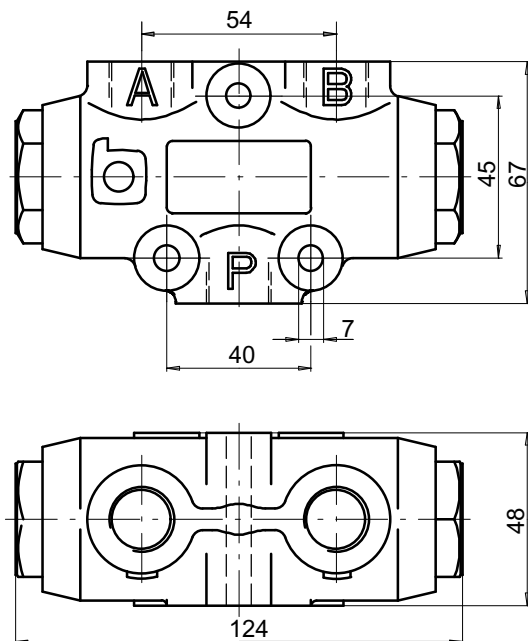

5.2 MTDA16

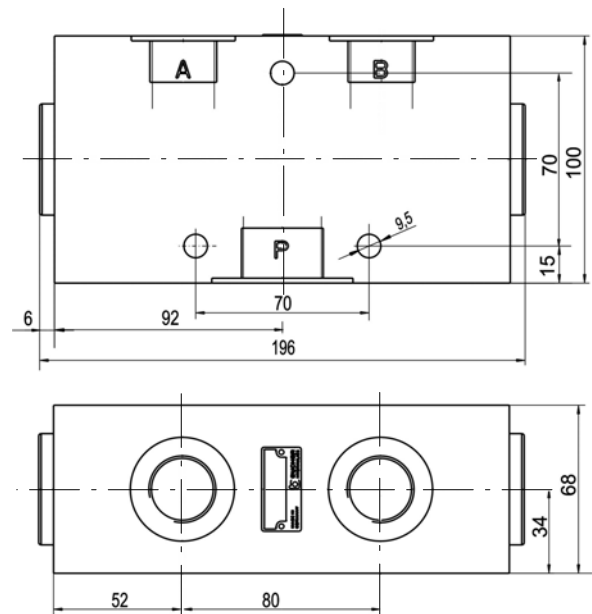

	MTDA08	MTDA16
Weights	1,5 kg	8 kg
A, B, P	see section 6	

6 Ordering code

	<div style="display: flex; justify-content: space-around; font-weight: bold; font-size: 1.2em;"> MTDA08 - 004 M30 / </div>																									
Flow divider																										
Bi-directional																										
Threaded ports																										
Nominal size	<div style="display: flex; justify-content: space-around;"> 0816 </div>																									
Flow range inlet flow:																										
Nenngröße 08	Nenngröße 16																									
004 = 2-4 l/min	025 = 12-25 l/min																									
006 = 3-6 l/min	032 = 16-32 l/min																									
008 = 4-8 l/min	050 = 25-50 l/min																									
012 = 6-12 l/min	075 = 37-75 l/min																									
016 = 8-16 l/min	100 = 50-100 l/min																									
100 = 50-100 l/min	250 = 75-250 l/min																									
Port threads																										
	<div style="display: flex; justify-content: space-around;"> <div style="border-right: 1px solid black; padding-right: 10px;"> <p style="text-align: center; margin: 0;">M = Metric</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">Flow range</td> <td style="padding: 5px;">P</td> <td style="padding: 5px;">A + B</td> </tr> <tr> <td style="padding: 5px;">004-025</td> <td style="padding: 5px;">M18 x 1,5</td> <td style="padding: 5px;">M18 x 1,5</td> </tr> <tr> <td style="padding: 5px;">032-100</td> <td style="padding: 5px;">M22 x 1,5</td> <td style="padding: 5px;">M18 x 1,5</td> </tr> <tr> <td style="padding: 5px;">100-120</td> <td style="padding: 5px;">M27 x 2</td> <td style="padding: 5px;">M22 x 1,5</td> </tr> <tr> <td style="padding: 5px;">160-250</td> <td style="padding: 5px;">M33 x 2</td> <td style="padding: 5px;">M27 x 2</td> </tr> </table> </div> <div style="padding-left: 10px;"> <p style="text-align: center; margin: 0;">R = Inch</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">P</td> <td style="padding: 5px;">A + B</td> </tr> <tr> <td style="padding: 5px;">G 3/8"</td> <td style="padding: 5px;">G 3/8"</td> </tr> <tr> <td style="padding: 5px;">G 1/2"</td> <td style="padding: 5px;">G 3/8"</td> </tr> <tr> <td style="padding: 5px;">G 3/4"</td> <td style="padding: 5px;">G 1/2"</td> </tr> <tr> <td style="padding: 5px;">G 1"</td> <td style="padding: 5px;">G 3/4"</td> </tr> </table> </div> </div>	Flow range	P	A + B	004-025	M18 x 1,5	M18 x 1,5	032-100	M22 x 1,5	M18 x 1,5	100-120	M27 x 2	M22 x 1,5	160-250	M33 x 2	M27 x 2	P	A + B	G 3/8"	G 3/8"	G 1/2"	G 3/8"	G 3/4"	G 1/2"	G 1"	G 3/4"
Flow range	P	A + B																								
004-025	M18 x 1,5	M18 x 1,5																								
032-100	M22 x 1,5	M18 x 1,5																								
100-120	M27 x 2	M22 x 1,5																								
160-250	M33 x 2	M27 x 2																								
P	A + B																									
G 3/8"	G 3/8"																									
G 1/2"	G 3/8"																									
G 3/4"	G 1/2"																									
G 1"	G 3/4"																									
Division ratio, see section 6.1																										
Variants / special features (to be inserted by the factory)																										

6.1 Unequal division on enquiry

In the case of unequal division, the division ratio is shown in the flow divider model code

e. g. 13 = 1 : 1,3
 20 = 1 : 2
 30 = 1 : 3

Ordering example:

Flow range: Q_{Zu} 60 l/min with unequal division of 1 : 3

Flow divider: **MTDA08-075M30**

At an inlet flow rate of 60 l/min the unequal division prod. : 15 l/min at port A and 45 l/min at port B

6.2 Example for division accuracy

Flow range: Q_{Zu} 60 l/min, required division of $Q_A/Q_B = 30$ l/min (division 1 : 1)

Flow divider: **MTDA08-075M**

flow range 37...75 l/min
 max. flow rate 75 l/min

max. allowable deviation = 75 l/min x $\pm 3\%$ = $\pm 2,25$ l/min

resulting part- flow rate at Q_{Zu} 60 l/min:

Port A - $Q_{min} = 27,75$ l/min / $Q_{max} = 32,25$ l/min
 Port B - $Q_{min} = 27,75$ l/min / $Q_{max} = 32,25$ l/min

7 End-stop synchronisation of parallel-connected cylinders

When one of the two cylinders reaches its end-stop, the flow to the other cylinder drops to approx. 5-10% of its nominal rate. This leakage flow enables the second cylinder, which has not yet reached its final position, to slowly resynchronise itself. To enable full-speed resynchronisation of the lagging cylinder, each actuator line from the flow divider must be equipped with a pressure relief valve.

8 Installation attitude and mounting

To prevent the weight of the spool causing division inaccuracies, the valve must be installed so that the spool axis is horizontal. When mounting the valve, make sure that the body is not subjected to any distorting forces. Do not use tapered-thread pipe fittings.