


PVV3 DN25 - BG 5 - ISO 25 (T)



THREADS	CH2	L2	CH3	L3	L4	ØT	F	STANDARD	FEMMINA - FEMALE - MUFFE - FEMELLE			MASCHIO - MALE - STECKER - MALE		
									COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)
IG 1	41	100	41	87.5			BSP 3/4"	DIN 3852-2-X	PVV3.2519.112	823	10	PVV3.2519.113 T	696	18
	41	100	41	87.5			NPT 3/4"	ANSI B1.20.3	PVV3.2519.012	830	10	PVV3.2519.013 T	703	18
	41	100	41	87.5			RC 3/4"	EN 10226	PVV3.2519.042	829	10	PVV3.2519.043 T	703	18
	41	100	41	87.5			BSP 1"	DIN 3852-2-X	PVV3.2525.112	768	10	PVV3.2525.113 T	641	18
	41	100	41	87.5			NPT 1"	ANSI B1.20.3	PVV3.2525.012	780	10	PVV3.2525.013 T	654	18
	41	100	41	87.5			M30x1.5	ISO 6149-1	PVV3.2530.102	795	10	PVV3.2530.103 T	669	18
IG 2	41	100	41	87.5			1"1/16-12 UN 2B	SAE J 1926-1	PVV3.2527.032	816	10	PVV3.2527.033 T	690	18
	41	100	41	87.5			1"5/16-12 UN 2B	SAE J 1926-1	PVV3.2533.032	757	10	PVV3.2533.033 T	631	18
AG 2	41	104.1	41	91.6	23.1		1"5/16-12 UN 2A	SAE J 514	PVV3.2533.302	757	10	PVV3.2533.303 T	630	18
AGS 2	41	126.4	41	113.9	45.4		1"5/16-12 UN 2A	SAE J 514	PVV3.2533.502	869	10	PVV3.2533.503 T	728	10
AG 5	41	102	41	89.5	18		BSP 1"	DIN 3852-2-B	PVV3.2525.212	765	10	PVV3.2525.213 T	639	18
	41	100	41	87.5	16		BSP 3/4"	DIN 3852-2-A	PVV3.2519.712	741	10	PVV3.2519.713 T	615	18
	41	102	41	89.5	18		BSP 1"	DIN 3852-2-A	PVV3.2525.712	767	10	PVV3.2525.713 T	641	18
AG 3	41	93	41	80.5	12	18L	M26x1.5	ISO 8434-1-L	PVV3.2526.302	718	10	PVV3.2526.303 T	591	18
	41	95	41	82.5	14	22L	M30x2	ISO 8434-1-L	PVV3.2530.302	723	10	PVV3.2530.303 T	596	18
	41	95	41	82.5	14	28L	M36x2	ISO 8434-1-L	PVV3.2536.302	728	10	PVV3.2536.303 T	601	18
	46	97	46	84.5	16	35L	M45x2	ISO 8434-1-L	PVV3.2545.302	816	10	PVV3.2545.303 T	690	18
	41	97	41	84.5	16	20S	M30x2	ISO 8434-1-S	PVV3.2530.402	734	10	PVV3.2530.403 T	607	18
	41	99	41	86.5	18	25S	M36x2	ISO 8434-1-S	PVV3.2536.402	757	10	PVV3.2536.403 T	630	18
	46	101	46	88.5	20	30S	M42x2	ISO 8434-1-S	PVV3.2542.402	837	10	PVV3.2542.403 T	711	18
	55	103	55	90.5	22	38S	M52x2	ISO 8434-1-S	PVV3.2552.402	1025	10	PVV3.2552.403 T	898	18
AGS 3	41	115	41	102.5	34	18L	M26x1.5	ISO 8434-1-L	PVV3.2526.502	806	10	PVV3.2526.503 T	679	10
	41	115	41	102.5	34	22L	M30x2	ISO 8434-1-L	PVV3.2530.502	831	10	PVV3.2530.503 T	705	10
	41	115	41	102.5	34	28L	M36x2	ISO 8434-1-L	PVV3.2536.502	869	10	PVV3.2536.503 T	742	10
	46	121	46	108.5	40	35L	M45x2	ISO 8434-1-L	PVV3.2545.502	1083	10	PVV3.2545.503 T	957	10
	41	117	41	104.5	36	20S	M30x2	ISO 8434-1-S	PVV3.2530.602	848	10	PVV3.2530.603 T	722	10
	41	119	41	106.5	38	25S	M36x2	ISO 8434-1-S	PVV3.2536.602	910	10	PVV3.2536.603 T	783	10
	46	121	46	108.5	40	30S	M42x2	ISO 8434-1-S	PVV3.2542.602	1019	10	PVV3.2542.603 T	893	10
	55	134	55	121.5	53	38S	M52x2	ISO 8434-1-S	PVV3.2552.602	1416	10	PVV3.2552.603 T	1289	10

THREADS

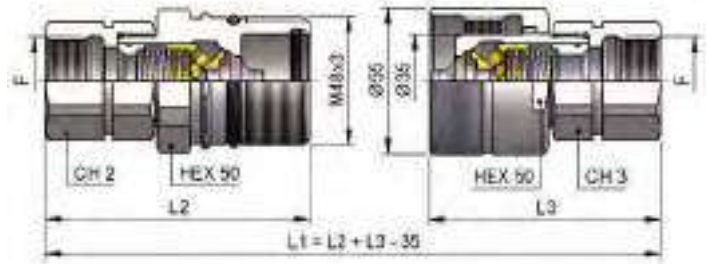