
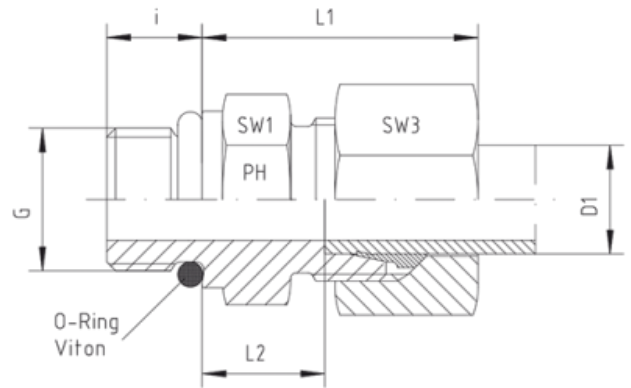


## Rubrik 8.96

### UNF - Standard

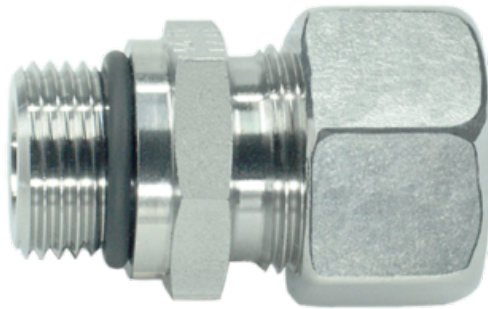

#### Male Stud Couplings

##### S-Series

Thread: UNF (ASA B 1.1 - 1960)

Sealing by O-ring in Thread Undercut - SAE J 514

Note: A special part shape must be machined.

Other jump sizes on request!

| Pressure | Tube O.D. | Thread | Approx. Dimensions |    |   |     |     | O-ring | Order-Code | Gross-    |
|----------|-----------|--------|--------------------|----|---|-----|-----|--------|------------|-----------|
| PN       | D1        | G      | L1                 | L2 | i | SW1 | SW3 |        |            | Price (€) |

#### Series S

|     |    |              |      |      |      |    |    |              |                   |       |
|-----|----|--------------|------|------|------|----|----|--------------|-------------------|-------|
| 630 | 6  | 7/16"-20 UNF | 28,0 | 13,0 | 9,2  | 17 | 17 | 8,92 x 1,83  | GE-S-06-7/16"-UNF | 23,19 |
| 630 | 6  | 9/16"-18 UNF | 29,0 | 13,0 | 10,0 | 19 | 17 | 11,90 x 1,98 | GE-S-06-9/16"-UNF | 23,90 |
| 630 | 8  | 7/16"-20 UNF | 30,0 | 15,0 | 9,2  | 17 | 19 | 8,92 x 1,83  | GE-S-08-7/16"-UNF | 23,60 |
| 630 | 8  | 1/2"-20 UNF  | 30,0 | 15,0 | 9,2  | 17 | 19 | 10,52 x 1,83 | GE-S-08-1/2"-UNF  | 23,60 |
| 630 | 8  | 9/16"-18 UNF | 30,0 | 13,0 | 10,0 | 19 | 19 | 11,90 x 1,98 | GE-S-08-9/16"-UNF | 23,60 |
| 630 | 10 | 9/16"-18 UNF | 31,0 | 15,5 | 10,0 | 19 | 22 | 11,90 x 1,98 | GE-S-10-9/16"-UNF | 24,34 |
| 630 | 10 | 3/4"-16 UNF  | 31,0 | 15,0 | 11,2 | 24 | 22 | 16,36 x 2,20 | GE-S-10-3/4"-UNF  | 25,99 |
| 630 | 12 | 9/16"-18 UNF |      | 14,5 | 10,0 | 22 | 24 | 11,90 x 1,98 | GE-S-12-9/16"-UNF | 26,40 |
| 630 | 12 | 3/4"-16 UNF  | 33,5 | 17,5 | 11,2 | 24 | 24 | 16,36 x 2,20 | GE-S-12-3/4"-UNF  | 26,50 |
| 630 | 12 | 7/8"-14 UNF  | 32,5 | 14,8 | 12,7 | 27 | 24 | 19,18 x 2,46 | GE-S-12-7/8"-UNF  | 27,20 |
| 630 | 14 | 9/16"-18 UNF | 37,0 | 19,0 | 10,0 | 24 | 27 | 11,90 x 1,98 | GE-S-14-9/16"-UNF | 39,90 |
| 630 | 14 | 3/4"-16 UNF  | 37,0 | 19,0 | 11,2 | 24 | 27 | 16,36 x 2,20 | GE-S-14-3/4"-UNF  | 30,26 |

|     |    |               |      |      |      |    |    |              |                    |        |
|-----|----|---------------|------|------|------|----|----|--------------|--------------------|--------|
| 400 | 16 | 3/4"-16 UNF   | 37,0 | 18,5 | 11,2 | 27 | 30 | 16,36 x 2,20 | GE-S-16-3/4"-UNF   | 30,26  |
| 400 | 16 | 7/8"-14 UNF   | 33,5 | 15,5 | 14,0 | 30 | 30 | 19,18 x 2,46 | GE-S-16-7/8"-UNF   | 32,06  |
| 400 | 16 | 1 1/16"-12 UN | 37,0 | 18,5 | 15,0 | 32 | 30 | 23,47 x 2,95 | GE-S-16-1 1/16"-UN | 44,31  |
| 400 | 20 | 3/4"-16 UNF   | 42,0 | 20,5 | 11,2 | 32 | 36 | 16,36 x 2,20 | GE-S-20-3/4"-UNF   | 46,68  |
| 400 | 20 | 7/8"-14 UNF   | 42,0 | 20,5 | 12,7 | 32 | 36 | 19,18 x 2,46 | GE-S-20-7/8"-UNF   | 46,68  |
| 400 | 20 | 1 1/16"-12 UN | 42,0 | 20,5 | 15,0 | 32 | 36 | 23,47 x 2,95 | GE-S-20-1 1/16"-UN | 46,68  |
| 400 | 20 | 1 5/16"-12 UN |      | 22,5 | 15,0 | 41 | 36 | 29,74 x 2,95 | GE-S-20-1 5/16"-UN | 72,15  |
| 400 | 25 | 1 1/16"-12 UN | 47,0 | 23,0 | 15,0 | 41 | 46 | 23,47 x 2,95 | GE-S-25-1 1/16"-UN | 72,57  |
| 400 | 25 | 1 5/16"-12 UN | 47,0 | 23,0 | 15,0 | 41 | 46 | 29,74 x 2,95 | GE-S-25-1 5/16"-UN | 72,57  |
| 400 | 30 | 1 1/16"-12 UN | 50,0 | 23,5 | 15,0 | 46 | 50 | 23,47 x 2,95 | GE-S-30-1 1/16"-UN | 174,88 |
| 400 | 30 | 1 5/16"-12 UN | 50,0 | 23,5 | 15,0 | 46 | 50 | 29,74 x 2,95 | GE-S-30-1 5/16"-UN | 151,44 |
| 400 | 30 | 1 5/8"-12 UN  | 50,0 | 23,5 | 15,0 | 50 | 50 | 37,46 x 3,00 | GE-S-30-1 5/8"-UN  | 151,44 |
| 315 | 38 | 1 5/16"-12 UN | 57,0 | 26,0 | 15,0 | 55 | 60 | 29,74 x 2,95 | GE-S-38-1 5/16"-UN | 228,50 |
| 315 | 38 | 1 5/8"-12 UN  | 57,0 | 26,0 | 15,0 | 55 | 60 | 37,46 x 3,00 | GE-S-38-1 5/8"-UN  | 201,21 |
| 315 | 38 | 1 7/8"-12 UN  | 57,0 | 26,0 | 15,0 | 55 | 60 | 43,69 x 3,00 | GE-S-38-1 7/8"-UN  | 201,21 |