



## Instant Connection of 4 up to 7 hydraulic and 1 electric lines



### Hydraulic specification




|                    |             |
|--------------------|-------------|
| Type               | ISO A       |
| Size               | 1/2"        |
| Quantity           | 4 to 7      |
| Operating Flow     | 45 L/min    |
| Operating Pressure | 250 bar     |
| Pressure Drop      | 1.50 bar    |
| End Termination    | M 22x150    |
| Fitting            | Male        |
| O'ring             | NBR / Viton |



|                    |             |
|--------------------|-------------|
| Type               | ISO A       |
| Size               | 1/2"        |
| Quantity           | 4 to 7      |
| Operating Flow     | 45 L/min    |
| Operating Pressure | 250 bar     |
| Pressure Drop      | 1.50 bar    |
| End Termination    | M 18x150    |
| Fitting            | Male        |
| O'ring             | NBR / Viton |

### Electric specification

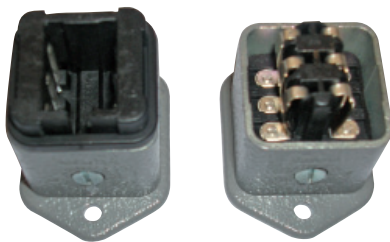

|                     |                     |
|---------------------|---------------------|
| Number of contacts  | 6                   |
| Operating Intensity | 10A max             |
| Operating Voltage   | 25V/60V             |
| Temperature range   | -40°C +100°C        |
| Treatment           | Copper silver-alloy |
| Fitting             | To screw            |

Mach Connectors reserves the right to modify characteristics, equipment and prices of the models shown without prior notice. This document is under no circumstances legally binding. No part of this publication may be reproduced.