




## 130 - GREASING

Constant pressure thermoplastic hose for high pressure greasing applications up to 400 bar (5800 psi)

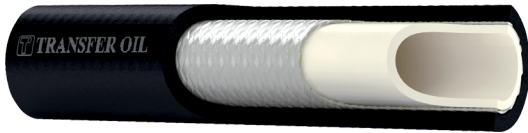

### FEATURES

#### Inner Tube

Thermoplastic polymer

#### Reinforcement

One braid of synthetic fiber

#### Cover

Thermoplastic polymer - black - white inkjet branding - non pinpricked (\*130C version is pinpricked)

#### Applications

Manual and air-operated greasing guns - Central greasing and lubrication systems

#### Features

Polyester reinforcement for high pressure - Extremely compact and flexible - Highly kink resistant - Special anti sticky cover for easy installation and compact routing - TPU cover versions guarantees anti-abrasion properties

#### Description

High pressure hose suitable for petroleum or synthetic or water based hydraulic fluids specifically designed for diverse greasing and lubrication applications of industrial vehicles and handheld or automatic greasing distribution equipment - different versions to suit multiple fitting brands

#### Temperature Range

-40 °C to +60 °C (-40 °F to +140 °F); limited to -20 °C (-4 °F) for non TPU versions

#### Specifications

Meets requirements of DIN 1283.

#### Standard Branding

 **TRANSFER OIL** - TO INDUSTRIAL - Part No - GREASING HOSE - 4 mm X 9.7 mm - Inch Size - DN Size - WP bar / psi - BP 1000 bar / 14500 psi MADE IN ITALY - www.transferoil.com - Batch No

 **TRANSFER OIL** - TO INDUSTRIAL - Part No - GREASING HOSE - 4 mm X 8.3 mm - Inch Size - DN Size - WP bar / psi - BP 1000 bar / 14500 psi MADE IN ITALY - www.transferoil.com - Batch No

| Part no. | DN  | Inches | Dash | ID (mm) | OD (mm) | WP (bar) | BP (bar) | ID (inch) | OD (inch) | WP (psi) | BP (psi) | SF    | BR (mm) | BR (inch) | Weight (gr/m) | Weight (lb/ft) | Ferrule standard | Ferrule A316L |
|----------|-----|--------|------|---------|---------|----------|----------|-----------|-----------|----------|----------|-------|---------|-----------|---------------|----------------|------------------|---------------|
| 130A     | DN4 | 5/32   | -    | 4.0     | 9.7     | 400      | 1000     | 0.157     | 0.382     | 5800     | 14500    | 2.5:1 | 35      | 1.38      | 68            | 0.046          | SAA101           | SAA801        |
| 130C     | DN4 | 5/32   | -    | 4.0     | 8.3     | 400      | 1000     | 0.157     | 0.327     | 5800     | 14500    | 2.5:1 | 25      | 0.98      | 52            | 0.035          | SAB101           | SAB801        |

Dimensions and values shown may be changed without prior notice to improve product performances and reliability.

Transfer Oil S.p.A. assumes no liability on mistakes nor errors appearing in this spec sheet.

Document date: 24/03/2022

www.transferoil.com