


# HPD DOUBLE PISTON ACCUMULATORS

HPD type 20 one piece threaded End Flange -design

Product Name	Max Allowable Pressure / bar	Capacity / litre	Dimensions ID / OD / L	Standard Fluid Port	Weight / KG
--------------	------------------------------	------------------	------------------------	---------------------	-------------

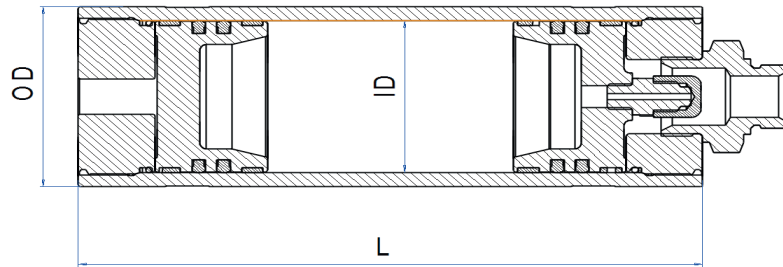

ID Ø 50

PED / SELO / ASME	Max Allowable Pressure / bar	Capacity / litre	Dimensions ID / OD / L	Standard Fluid Port	Weight / KG
HPD20-250-050-0004	250	0.4	50/60/330	R3/4"	4.8
HPD20-250-050-0005	250	0.5	50/60/381	R3/4"	5.1
HPD20-250-050-0007	250	0.65	50/60/457	R3/4"	5.6
HPD20-250-050-0010	250	1	50/60/635	R3/4"	6.8

ID Ø 80

PED / SELO / ASME	Max Allowable Pressure / bar	Capacity / litre	Dimensions ID / OD / L	Standard Fluid Port	Weight / KG
HPD20-250-080-0004	250	0.4	80/90/191	R3/4"	6.0
HPD20-250-080-0005	250	0.5	80/90/211	R3/4"	6.2
HPD20-250-080-0008	250	0.75	80/90/261	R3/4"	6.7
HPD20-250-080-0010	250	1	80/90/311	R3/4"	7.3
HPD20-250-080-0020	250	2	80/90/510	R3/4"	9.4
HPD20-250-080-0030	250	3	80/90/709	R3/4"	11.5