


HYDRAULIC CABLE CUTTERS

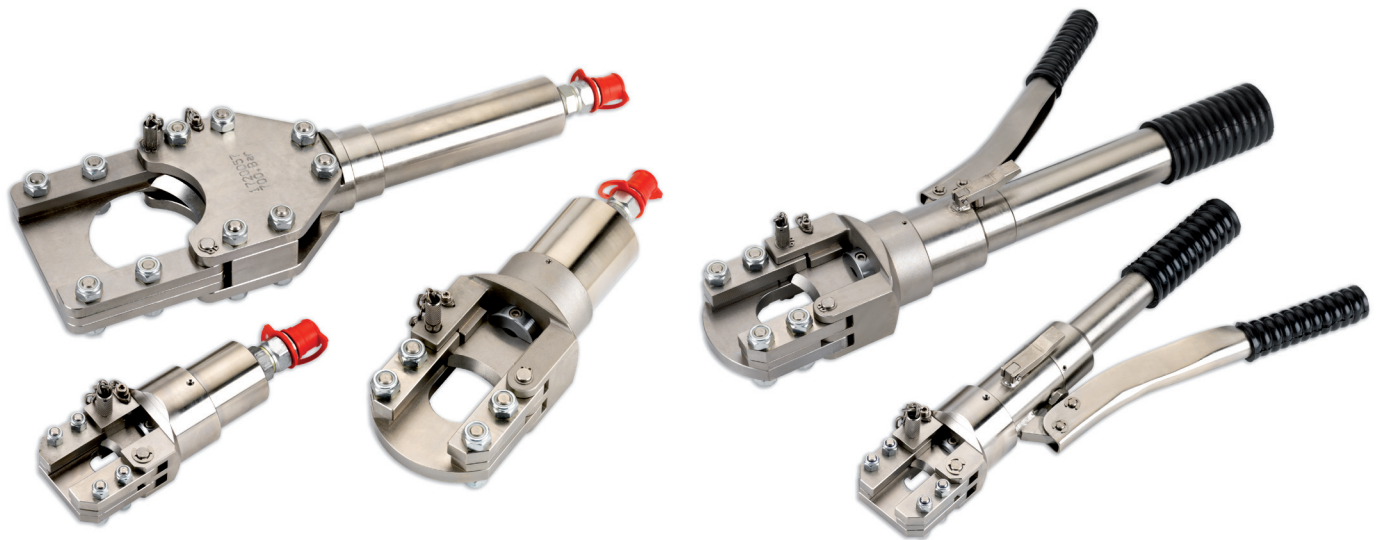

LARZEP advantages

- Maximum working pressure 700 bar.
- Single acting models have spring return.
- CC0260 model is double acting and is especially recommended for sub-sea applications. Optionally we can supply special seal kits for deep water operation.
- CC0018, CC0040 and CC0075 models are self contained, with integral pump to enable working in difficult positions. These tools are supplied with a relief valve to prevent overload.
- Plastic carry box included for easy transport and tool protection.
- Rotating heads for easy operation.
- Installing replacement blades is a simple operation.
- All models are provided with a male ball quick coupler AZ3321.

Model	Capacity	Oil Capacity	L	C	Weight	Wire Rope ϕ	
						Aluminium with copper	Aluminium with steel
LARZEP	kN	cm ³	mm	mm	kg	mm	mm
CC0018	70	-	385	19	2,8	18	18
CC0040	135	-	490	41	5,6	40	40
CC0075	70	-	650	77	6,6	40	*
CC0118	70	24	212	18	2,0	18	18
CC0140	135	86	292	40	5,3	40	40
CC0160	437	420	388	64	15,8	60	60
CC0175	70	74	451	75	5,5	40	*
CC0190	109	149	535	90	10,0	35	*
CC01120	109	203	635	120	11,7	35	*
CC0260	390	431	480	64	28,0	60	60

* This unit is not designed to cut this material. Any attempt to do so may result in personal injury or damage to the unit and will void the warranty.



Air Hydraulic Pump Z12107.

Page. 82



Battery Powered Portable Hydraulic Pump HAB1101.

Page. 102

HYDRAULIC CABLE CUTTERS

CC



5-43 Tn

ø 12-120 mm

700 bar

TOOLS

CC0118, CC0140, CC0160, CC0175, CC0190, CC01120, CC0260

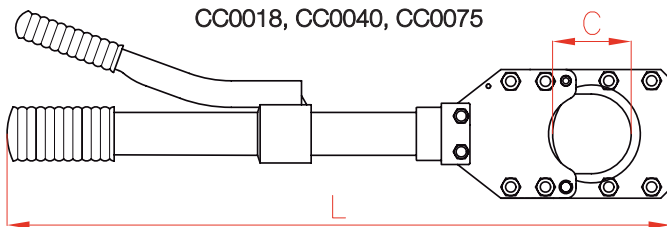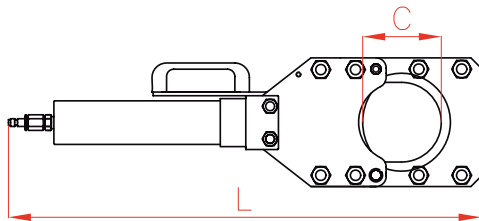

CC0018, CC0040, CC0075

Model	Replacement Blades
LARZEP	LARZEP
CC0018	CRC18
CC0040	CRC35-40
CC0075	CRC75
CC0118	CRC18
CC0140	CRC35-40
CC0160	CRC0160
CC0175	CRC75
CC0190	CRC0190
CC01120	CRC01120
CC0260	CRC0160

	Cable ø			Steel Rope ø ¹⁾		Bar ø ²⁾			Model
	Telephone	Lead Shielded	Underground	Rope	Wire	Steel	Copper alloy	Aluminium alloy	
	mm	mm	mm	mm	mm	mm	mm	mm	LARZEP
	18	18	18	18	1	12	15	15	CC0018
	40	40	40	32	1	20	30	30	CC0040
	75	75	75	*	*	*	*	*	CC0075
	18	18	18	18	1	12	15	15	CC0118
	40	40	40	32	1	20	30	30	CC0140
	60	60	60	60	2	25	35	35	CC0160
	75	75	75	*	*	*	*	*	CC0175
	90	90	90	*	*	*	*	*	CC0190
	120	120	120	*	*	*	*	*	CC01120
	60	60	60	60	2	25	35	35	CC0260

Shown diameters are only for guidance.

1) Max. Strength 1.800 N/mm² 2) Max. Strength 400 N/mm²