

HYDRAULIC PIPE BENDERS



LARZEP advantages

- Suitable for carrying out bending operations with plumbing pipes.
- Pipe bending capacities of up to 2", 3" and 6" NB.
- Models: with hand pump (VA, VB), with electric pump (VC), or with air/hydraulic pump (VZ).
- Equipped with a safety relief valve to prevent overpressure.
- Delivered in sturdy wooden storage boxes.
- VB1225, VA2336, VC2336, VZ2336 models equipped with a tripod stand.



Hand Pumps, W.

Page. 80




Air Hydraulic Pump
Z12107.

Page. 82



Manual Powerpacks,
HAM.

Page. 84

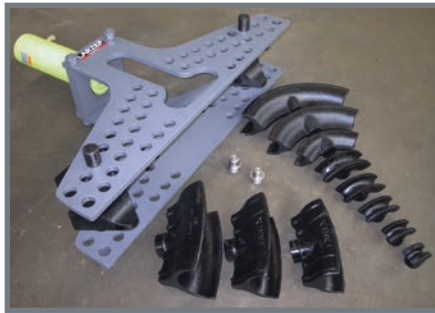

VC7532

HYDRAULIC PIPE BENDERS

VA - VB
VC - VZ

3/8 - 6 inch


700 bar

AUTOMOTIVE

HYDRAULIC PIPE BENDERS

Pipe	Model	Pump type			Cylinder	Stroke	Tripod stand	Weight
"	LARZEP	Hand	Electric	Air	LARZEP	mm	*	kg
3/8 - 2"	VA1225	W10707	-	-	SM01025	257	-	55
	VB1225	W10707	-	-	SM01025	257	*	59
	VZ1225	-	-	Z12107	SM01025	257	-	57
	VC1225	-	HAM1211	-	SM01025	257	-	90
1/2 - 3"	VA2336	W22307	-	-	SM02336	362	-	120
	VZ2336	-	-	Z12107	SM02336	362	-	115
	VC2336	-	HAM7244	-	SM02336	362	-	140
1/2 - 6"	VC7532	-	HAM7244	-	D07532	320	-	465

BENDING SHOES

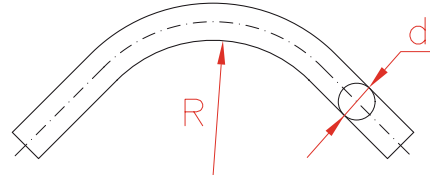

VA1225, VB1225, VZ1225, VC1225

Nominal Bore	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
External Diameter d (mm)	17,2	21,3	26,9	33,7	42,4	48,3	60,3
Maximun Wall Thickness (mm)	2,9	3,2	3,2	4,0	4,0	4,0	4,5
Bend Radius R (mm)	60	85	120	140	175	210	260

VA2336, VZ2336, VC2336 - Pipe DIN - 2440

Nominal Bore	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
External Diameter d (mm)	21,3	26,9	33,7	42,4	48,3	60,3	76,1	88,9
Maximun Wall Thickness (mm)	2,65	2,65	3,25	3,25	3,25	3,65	3,65	4,05
Bend Radius R (mm)	83	114	146	184	210	241	290	350

VC7532 - S/BS 1387

Nominal Bore	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"
External Diameter d (mm)	21,3	26,9	33,7	42,4	48,3	60,3	76,1	88,9	114,0	141,0	168,0
Maximun Wall Thickness (mm)	3,2	3,2	4,0	4,0	4,0	4,5	4,5	4,8	5,4	5,4	5,4
Bend Radius R (mm)	40	60	80	100	115	165	245	290	550	650	750