


Gerade Schottverschraubungen

Straight bulkhead couplings

arco

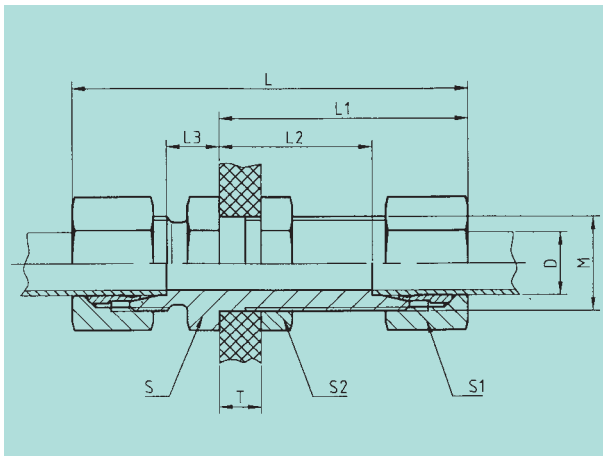

T = Maximale Schottdicke 16 mm / T = maximum bulkhead wall thickness 16 mm

Reihe	D	M	L	L ₁	L ₂	L ₃	S	S ₁	S ₂	Gewicht % in kg weight kg/100 pc	Sach.-Nr. comp. no.	Artikel-Nr. part. no.
series	D	M	L	L ₁	L ₂	L ₃	S	S ₁	S ₂			
L PN 315	6	M12x1,5	64	42	27	7	17	14	17	6,70	41398/21	GS6LHc3d
	8	M14x1,5	65	42	27	8	19	17	19	8,40	41399/21	GS8LHc3d
	10	M16x1,5	68	43	28	10	22	19	22	12,50	41400/21	GS10LHc3d
	12	M18x1,5	69	44	29	10	24	22	24	14,70	41401/21	GS12LHc3d
	15	M22x1,5	73	46	31	12	27	27	30	22,80	41402/21	GS15LHc3d
	18	M26x1,5	79	49	32,5	13,5	32	32	36	33,20	41403/21	GS18LHc3d
PN 160	22	M30x2	84	51	34,5	16,5	36	36	41	41,50	41404/21	GS22LHc3d
	28	M36x2	87	52	35,5	18,5	41	41	46	52,50	1405/21	GS28LHc3d
	35	M45x2	98	58	36,5	18,5	50	50	55	80,00	1406/21	GS35LHc3d
	42	M52x2	101	59	36	19	60	60	65	119,40	1407/21	GS42LHc3d
S PN 630	6	M14x1,5	71	44	29	12	19	17	19	9,60	1408/21	GS6SHc3d
	8	M16x1,5	72	44	29	13	22	19	22	12,40	1409/21	GS8SHc3d
	10	M18x1,5	77	46	29,5	14,5	24	22	24	18,10	1410/21	GS10SHc3d
	12	M20x1,5	78	47	30,5	14,5	27	24	27	21,00	1411/21	GS12SHc3d
PN 400	16	M24x1,5	85	50	31,5	16,5	32	30	32	31,00	1413/21	GS16SHc3d
	20	M30x2	94	55	33,5	17,5	41	36	41	54,50	1414/21	GS20SHc3d
	25	M36x2	103	59	35	20	46	46	46	89,00	1415/21	GS25SHc3d
	30	M42x2	112	64	37,5	21,5	50	50	50	107,70	1416/21	GS30SHc3d
PN 315	38	M52x2	121	68	37	22	65	60	65	143,80	1417/21	GS38SHc3d