
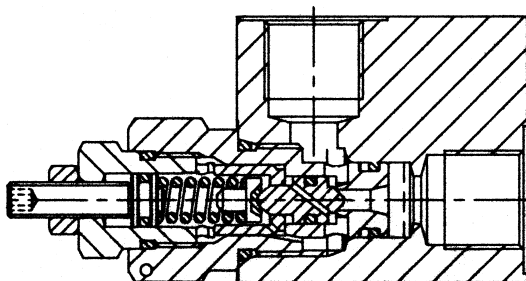
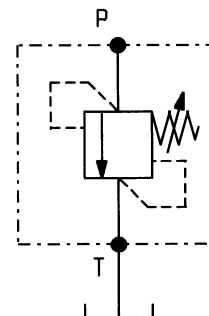


**VSC-20**

**05.13.07 - X - Y - Z**

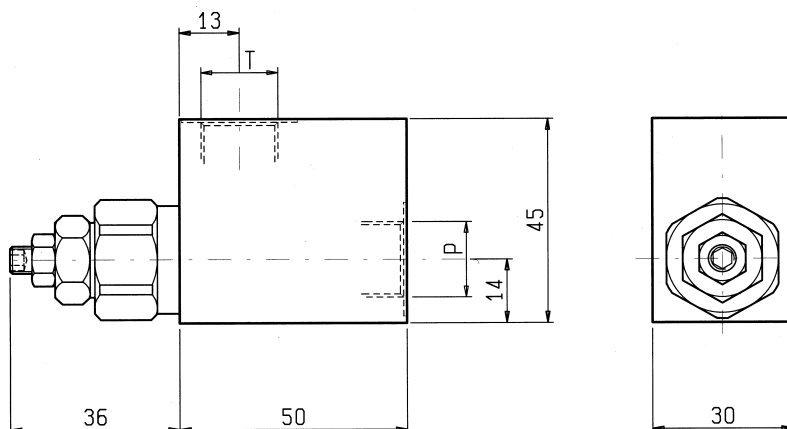


**DATI TECNICI / TECHNICAL DATA**

Pressione di lavoro max. 350 bar  
 Max. working pressure

Portata max. 20 l/min  
 Flow max.

Peso 0.425 kg  
 Weight

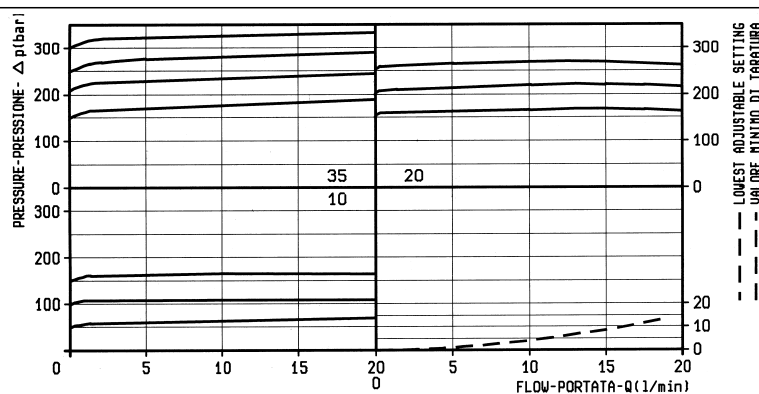

**X**

**REGOLAZIONI  
ADJUSTMENTS**

**03**

vite esterna  
 esagono incassato  
 leakproof hex.  
 socket screw



**04**

volantino  
 e dado  
 handknob  
 and locknut



cappello per piombatura  
 sealing cap  
 codice / ordering code  
 03.05.01.002



**MOLLE / SPRINGS**

Z	Campo taratura min - max bar Adj. press. range bar	Incremento press. bar / giro vite Press. increase bar / turn	Taratura standard bar (Q = 5 l/min) Std. setting bar (Q = 5 l/min)	Cod. ordinazione Ordering code	Colore Colour
<b>05</b>	30-50	8	50	03.51.01.133	nero black
<b>10</b>	40-150	38	100	03.51.01.121	blu blue
<b>20</b>	80-210	77	200	03.51.01.122	verde green
<b>35</b>	150-350	146	350	03.51.01.132	giallo yellow

**Y**

**ATTACCHI / PORT SIZE**

P - T

**02**

G 3/8