
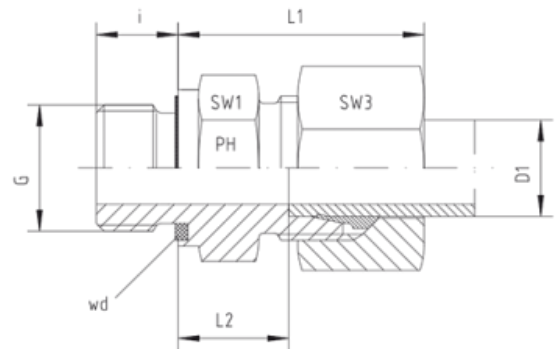


Rubrik 8.61

BSP - Parallel - wd - Standard

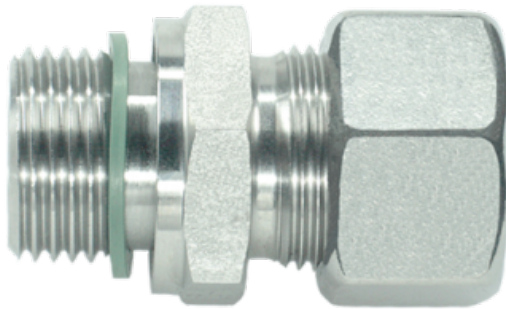

Male Stud Couplings

S-Series

Thread: BSP - Parallel

wd = Sealing by an Elastomer Profiled Ring - Viton

Pressure	Tube O.D.	Thread	Approx. Dimensions					Order-Code	Gross-
PN	D1	G	L1	L2	i	SW1	SW3		Price (€)

Series S

800	6	G 1/8"	28,0	13,0	8		17	GE-SR-06-G 1/8"-wd	10,84
800	6	G 1/4"	28,0	13,0	12	19	17	GE-SR-06-G 1/4"-wd	10,84
800	6	G 3/8"	30,0	15,5	12	22	19	GE-SR-06-G 3/8"-wd	13,09
630	6	G 1/2"	34,0	17,0	14	27	19	GE-SR-06-G 1/2"-wd	17,23
800	8	G 1/8"		14,0	8	17	19	GE-SR-08-G 1/8"-wd	12,48
800	8	G 1/4"	30,0	15,0	12	19	19	GE-SR-08-G 1/4"-wd	10,53
800	8	G 3/8"		15,5	12	22	19	GE-SR-08-G 3/8"-wd	11,84
630	8	G 1/2"		15,0	14	27	19	GE-SR-08-G 1/2"-wd	17,38
800	10	G 1/8"		13,5	8	19	22	GE-SR-10-G 1/8"-wd	15,08
800	10	G 1/4"		14,5	12	19	22	GE-SR-10-G 1/4"-wd	13,29
800	10	G 3/8"	31,0	15,0	12	22	22	GE-SR-10-G 3/8"-wd	12,99
630	10	G 1/2"		13,5	14	27	22	GE-SR-10-G 1/2"-wd	17,84
420	10	G 3/4"	36,0	17,5	16	32	22	GE-SR-10-G 3/4"-wd	28,89
630	12	G 1/4"		16,5	12	22	24	GE-SR-12-G 1/4"-wd	14,90

630	12	G 3/8"	33,0	17,0	12	22	24	GE-SR-12-G 3/8"-wd	13,91
630	12	G 1/2"	34,0	17,5	14	27	24	GE-SR-12-G 1/2"-wd	19,63
420	12	G 3/4"	36,0	17,5	16	32	24	GE-SR-12-G 3/4"-wd	29,40
630	14	G 1/4"	37,0	17,0	12	24	27	GE-SR-14-G 1/4"-wd	29,35
630	14	G 3/8"	37,0	17,0	12	24	27	GE-SR-14-G 3/8"-wd	17,18
630	14	G 1/2"	37,0	19,0	14	27	27	GE-SR-14-G 1/2"-wd	18,71
420	14	G 3/4"		19,0	16	32	27	GE-SR-14-G 3/4"-wd	29,40
630	16	G 1/4"	38,0	17,5	12	27	30	GE-SR-16-G 1/4"-wd	27,35
630	16	G 3/8"		18,0	12	27	30	GE-SR-16-G 3/8"-wd	24,64
630	16	G 1/2"	37,0	18,5	14	27	30	GE-SR-16-G 1/2"-wd	24,54
420	16	G 3/4"	39,0	20,5	16	32	30	GE-SR-16-G 3/4"-wd	30,93
420	16	G 1"	43,5	22,5	18	41	30	GE-SR-16-G 1"-wd	42,59
420	20	G 3/8"		18,0	12	32	36	GE-SR-20-G 3/8"-wd	37,07
420	20	G 1/2"		20,5	14	32	36	GE-SR-20-G 1/2"-wd	34,51
420	20	G 3/4"	42,0	20,5	16	32	36	GE-SR-20-G 3/4"-wd	31,60
420	20	G 1"		22,5	18	41	36	GE-SR-20-G 1"-wd	42,59
420	20	G 1 1/4"		22,5	20	50	36	GE-SR-20-G 1 1/4"-wd	49,08
420	25	G 1/2"		23,0	14	41	46	GE-SR-25-G 1/2"-wd	54,15
420	25	G 3/4"		23,0	16	41	46	GE-SR-25-G 3/4"-wd	52,59
420	25	G 1"	47,0	23,0	18	41	46	GE-SR-25-G 1"-wd	52,15
420	25	G 1 1/4"		23,0	20	50	46	GE-SR-25-G 1 1/4"-wd	59,18
420	30	G 3/4"		25,5	16	46	50	GE-SR-30-G 3/4"-wd	64,37
420	30	G 1"	50,0	23,5	18	46	50	GE-SR-30-G 1"-wd	61,41
420	30	G 1 1/4"	50,0	23,5	20	50	50	GE-SR-30-G 1 1/4"-wd	61,61
420	30	G 1 1/2"	50,0	23,5	22	55	50	GE-SR-30-G 1 1/2"-wd	70,87
420	38	G 1"	42,0	26,0	18	55	50	GE-SR-38-G 1"-wd	91,01
420	38	G 1 1/4"		23,0	20	55	60	GE-SR-38-G 1 1/4"-wd	77,64
420	38	G 1 1/2"	57,0	26,0	22	55	60	GE-SR-38-G 1 1/2"-wd	78,02
250	38	G 2"				70	60	GE-SR-38-G 2"-wd	*